

Auto Fan

KQ409 40cm/16"

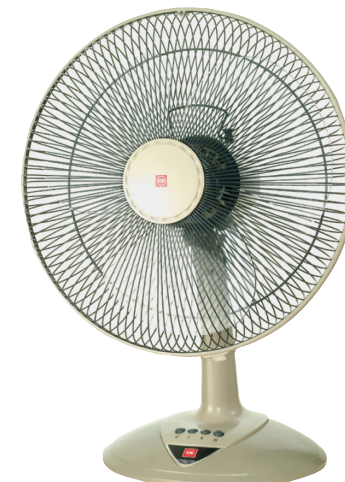
5 speed
360° oscillation
Adjustment angles 15°, 30°, 50°



Table Fans

KB-304 30cm/12"
KB-404 40cm/16"

3 speed on/off push button switch
Full automatic oscillation
Clutch control



Silver Blue
Beige
Flame Red

Stand Fans

KX-405 40cm/16"

3 speed on/off push button switch
Full automatic oscillation
Clutch control
Flexible neck adjustment



Deep Red
Metal Grey

Remote Control Wall Fan

KC-4GR 40cm/16"

Remote control with 3 preset speed
1-6 hours timer
Manual on/off and oscillation control
Soft touch control panel



Wall Fans

KU308 30cm/12"
KU408 40cm/16"
KU408 YG 40cm/16"
KU453 45cm/18"
KV408 40cm/16"

3-speed On/Off pull switch
Oscillation Control by pull switch
Flexible neck adjustment
Silver color blade for better durability
(Applicable to KV408 only)



White
KU408 YG & KV408 Grey

Commercial Wall Fan

KU50Y 50cm/20"
KU50Y-DG 50cm/20"

3 speed ON/OFF pull switch
Full automatic oscillation
Aluminium blade for stronger airflow and durability
Turbo Fin Guard design generates airflow up to 10 meter distance
New Front Guard Locking System
Added angle adjust bolt for extra stability



KU50Y White
KU50Y-DG Dark Grey

Ceiling Mounted Ventilating Fans

15TGQZ 15cm/6"
20CQT1 20cm/8"
25TGQ7 25cm/10"

Q-blade design
High efficiency airflow
Durable and long lasting operation
Low noise and energy saving



Ceiling Mounted Sirocco Ventilating Fans

17CUG
24CUG

Low Noise with Resonance Absorption Structure
Taper blade design for high performance
HP (half pitch) motor with ball bearing for better durability
Curve-shaped backdraft shutter



* While Stocks Last

17CUBM
24CUBM
24CGBM

Low Noise with Resonance Absorption Structure
Taper blade design for high performance
HP (half pitch) motor with ball bearing for better durability
Curve-shaped backdraft shutter



Glass Mounted Ventilating Fans

15WUD 15cm/6"
20WUD 20cm/8"

Advanced blade design
Ball bearing condenser motor
Pull cord operated shutter
Fit window panel thickness 3mm to 7mm
Low noise
Suitable for bathrooms



Wall Mounted Ventilating Fans

10EGKA 10cm/4"
15EGKA 15cm/6"

Excellent for bathroom
Easy installation
Equipped with full accessories
Easy Cleaning
Energy saving
Exhaust moisture and odour, preventing mould



25AUFA 25cm/10"
Raku-Raku®

Advanced blade design
High exhaust performance
Aluminium punching filter with non-stick coating
Oil container with collected oil level indicator
Suitable for kitchen use



* While Stocks Last

Wall Mounted Ventilating Fans

15AAQ1 15cm/6"
20AQM8 20cm/8"
25AQM7 25cm/10"
30AQM8 30cm/12"

Q-blade design
High efficiency airflow
Durable and long lasting operation
Low noise and energy saving
Automatic shutter



20ALH 20cm/8"
25ALH 25cm/10"

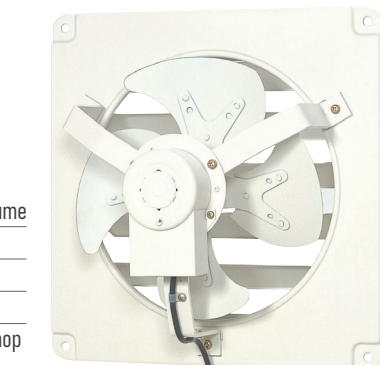
Curve shape front louver design
Aerodynamic blade design
High efficiency airflow
Ball bearing type motor for durability
Low noise and energy saving
Automatic shutter



* While Stocks Last

40KQT 40cm/16"

Large metal blade assembly for abundant air volume
Powerful, efficient and durable condenser motor
Possible to install horizontally
Automatic shutter
Ideal for factories, warehouse, restaurant, workshop



* While Stocks Last

Specifications

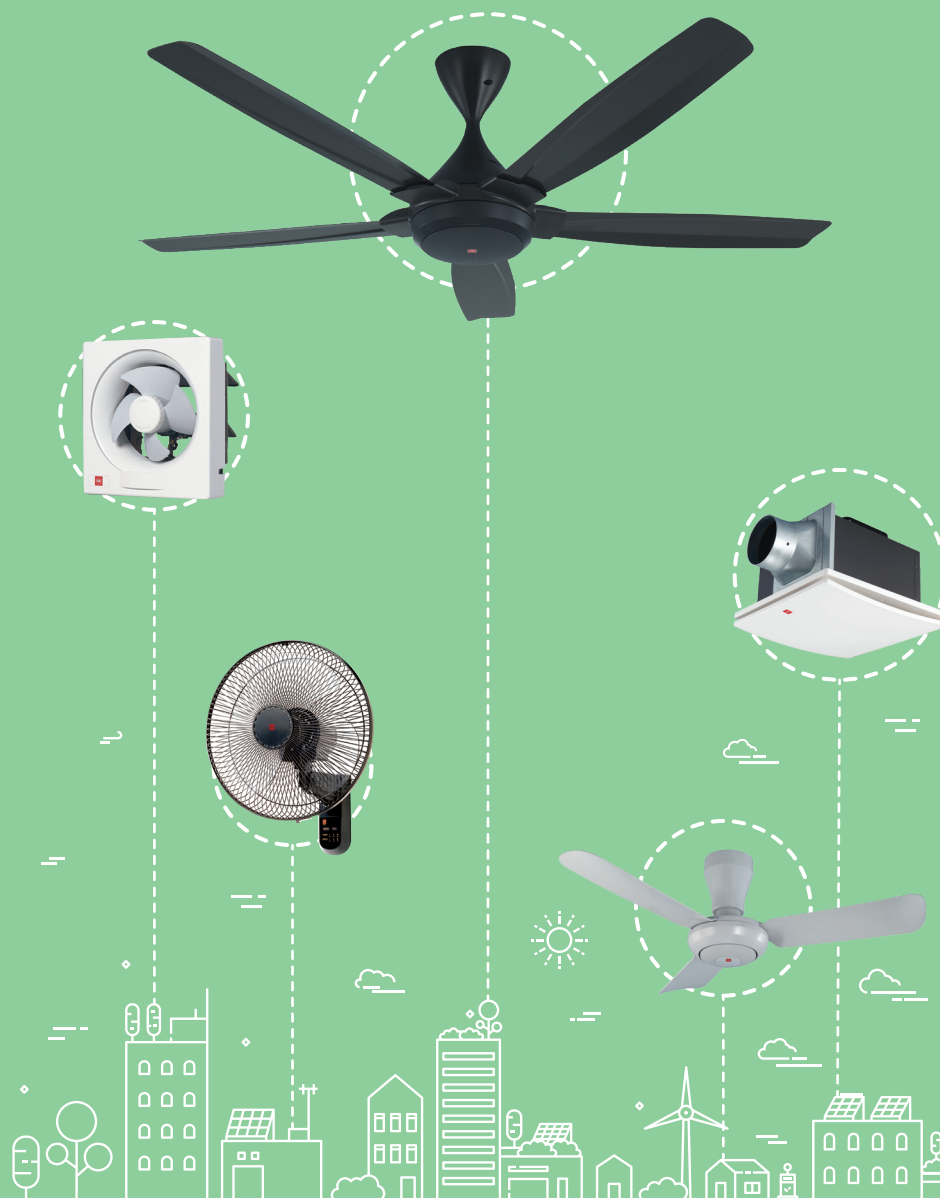
Model	RPM		Capacity (CFM)	Wattage		Noise Level (dB)	Operating Weight (kg)
	Low	High		Low	High		
K12W0	131-177	273-333	5721	15.1-20.5	47.7-58.3	<58	4.80
K15W0 / SL	81-118	216-264	8122	14.7-19.9	67.5-82.5	<62	5.30
K15V0 / PBR / K15VC	81-118	216-264	8122	14.7-19.9	67.5-82.5	<62	5.10
K12V0 / PBR	131-177	273-333	5721	15.1-20.5	47.7-58.3	<58	4.60
K15W0-S	81-118	216-264	8122	14.7-19.9	67.5-82.5	<62	5.30
K14X2 / PBR	113	257	7416	33.5	65.0	51.0	5.10
K12ZF-GY / WT	133	239	6004	20.0	58.0	49.5	5.10
K14Y2	102	215	7946	19.5	85.0	52.0	6.20
K15V2-CQ / GS	84	195	7946	20.5	85.0	48.0	7.40
K14X2-GY / PBR	102	196	7593	20.0	68.0	51.0	7.00
K14Y2-GY / PBR	95	183	7593	21.0	69.0	51.0	7.60
K14TE-DG / WT	80	200	7769	4.0	29.0	54.0	5.10
K14QF-DG / WT	80	175	7769	4.0	29.0	54.0	5.70
K12UX	80	236	6603	3.0	46.0	50.0	4.90
K15UW / QEY	80	235	8652	3.0	63.0	53.0	6.20
K14ZW	81	239	7946	2.5	41.0	51.0	4.90
K15Z5-QEY/ REY	80	235	8652	3.0	41.0	54.0	5.10 / 5.30
K12YC	55	170	7063	3.0	31.0	41.0	4.90
K12UC	55	170	7063	3.0	50.0	41.0	5.20
K15YC	80	245	10594	4.0	54.0	59.0	7.00
K15UC	80	245	10594	4.0	73.0	59.0	7.30
K15YX-QBR / RBR	80	235	8652	3.0	41.0	54.0	5.10 / 5.30
K18NY-RBR / SBR	80	185	11,477	6.0	55.0	54.0	11.70 / 11.90
KQ409	568-694	1089-1331	3002	18.3-22.4	46.8-57.2	<60	3.90
KB-304	878-1074	1123-1373	1518	25.2-30.8	34.7-42.5	<47	3.20
KB-404	774-946	1103-1349	2225	38.9-47.5	49.9-60.9	<60	4.30
KX-405	765-935	1089-1331	2225	40.8-49.8	52.2-63.8	<60	8.30
KC-46R	774-946	1103-1349	2225	43.0-52.7	53.4-65.2	<60	4.60
KU308	871-1065	1158-1416	1589	30.0-36.6	39.8-48.6	<50	3.30
KU408 / YG	774-946	1103-1349	2225	38.9-47.5	49.9-60.9	<60	4.45
KV408	839-1025	1135-1387	2225	38.3-46.8	48.2-59.0	<60	4.55
KU453	730-892	961-1175	3355	41.6-50.8	54.2-66.3	<60	5.00
KU50Y / DG	940	1280	3884	60.0	70.0	59.0	6.00
15TGQZ	1330		141		12	35.0	1.20
20CQT1	1207		265		25.7	41.0	1.80
25TGQ7	959-1172		367		24.8-30.3	45.0	1.90
17CUG	680		50		7.5	26.0	1.70
24CUG	530		82		10.5	27.0	2.70
17CUBM	800		53		9.5	24.0	1.90
24CUBM	680		94		12.0	26.0	2.90
24CGBM	995		129		25.5	38.0	2.90
15WUD	1463		124		8.0	35.0	0.90
20WUD	1042		212		16.0	32.0	1.10
10EGKA	2732		45		6.4	33.0	1.20
15EGKA	2405		96		6.9	35.0	1.50
25AUFA	1100		491		34.0	42.0	2.80
15AAQ1	1480		170		15.0	31.0	1.40
20AQM8	1109-1301		318		14.9-18.3	37.0	2.30
25AQM7	999-1221		530		25.2-30.8	39.0	2.60
30AQM8	925-1085		727		31.8-38.8	45.0	3.00
20ALH	1210		321		22.0	40.0	2.20
25ALH	1055		491		29.0	43.0	2.70
40KQT	1175		1212		61.0	49.0	6.40

* Specifications are subject to change without prior notice.
** Actual products & colours may vary from pictures shown.
*** All KDK fans come with Thermal Safety Fuse.



KDK **KDK FANS (M) SDN BHD** (Company No: 200201001186/568849-X)
3rd Floor, 15 Jalan Tandang, 46050 Petaling Jaya, Selangor.
Tel : 03-7785 5011
Fax : 03-7785 2655
Website: www.kdk.com.my

MP-23-B



2nd Edition
2023 / 2024

Ceiling Fans
ALTERNATING CURRENT (AC) MOTOR

K12WO 120cm/48"
K15WO 150cm/60"
K15WO-SL 150cm/60"

5 speed
Wider sweeping blade
Ideal for small rooms and space
(Applicable to K12WO only)
Durable metal blade

K12VO 120cm/48"
K15VO 150cm/60"
K15VC 150cm/60"

5 speed
Wider sweeping blade
Shorter blades for small rooms (K12VO)
Durable metal blade
Preassembled fan rod (K15VC)
Comply with government approved project standard (K15VC)



K12VO-PBR 120cm/48"
K15VO-PBR 150cm/60"

5 speed
Wider sweeping blade
Durable metal blade



K15WO-S 150cm/60"

5 speed
Wider sweeping blade
Double hybrid coating treatment
Suitable for coastal areas
Durable metal blade



K14X2 140cm/56"
K14X2-PBR 140cm/56"

Remote control with 3 preset speed
1-6 hours OFF timer
3-6 hours sleep mode
Frameless blade design
Durable metal blade

K11ZF-GY 110cm/44"
K11ZF-WT 110cm/44"

Remote control with 3 preset speed
1-6 hours OFF timer
3-6 hours sleep mode
Hook type installation
Suitable for low ceiling and small space
PPG blade

K14Y2 140cm/56"
V - Touch® Jr.

Remote control with 5 preset speed
1-6 hours OFF timer
3-6 hours sleep mode
1/f Yuragi (Natural Breeze)
3D Aero Curve blade design
PPG blade



K15Y2-CO 150cm/60"
K15Y2-GS 150cm/60"
V - Touch®

Remote control with 5 preset speed
1-6 hours OFF timer
3-6 hours sleep mode
1/f Yuragi (Natural Breeze)
3D Aero Curve blade design
PPG blade

K14XZ-GY 140cm/56"
Z series

Remote control with 3 preset speed
1-6 hours OFF timer
3-6 hours sleep mode
Durable metal blade



K14XZ-PBR 140cm/56"
Z series

Remote control with 3 preset speed
1-6 hours OFF timer
3-6 hours sleep mode
Durable metal blade



K14YZ-GY 140cm/56"
Z series

Remote control with 3 preset speed
1-6 hours OFF timer
3-6 hours sleep mode
Durable metal blade



K14YZ-PBR 140cm/56"
Z series

Remote control with 3 preset speed
1-6 hours OFF timer
3-6 hours sleep mode
Durable metal blade



Ceiling Fans
DIRECT CURRENT (DC) MOTOR

K14TE-DG 140cm/56"
DC4™ series

Remote control with 5 preset speed
1-6 hours OFF timer
3-6 hours sleep mode
1/f Yuragi (Natural Breeze)
DC Motor Technology
Durable metal blade



K14TE-WT 140cm/56"
DC4™ series

Remote control with 5 preset speed
1-6 hours OFF timer
3-6 hours sleep mode
1/f Yuragi (Natural Breeze)
DC Motor Technology
Durable metal blade



K14QF-DG 140cm/56"
DC5™ series

Remote control with 5 preset speed
1-6 hours OFF timer
3-6 hours sleep mode
1/f Yuragi (Natural Breeze)
DC Motor Technology
Durable metal blade



K14QF-WT 140cm/56"
DC5™ series

Remote control with 5 preset speed
1-6 hours OFF timer
3-6 hours sleep mode
1/f Yuragi (Natural Breeze)
DC Motor Technology
Durable metal blade




K12UX 120cm/48"

Remote control with 9 preset speed
1-8 hours OFF and ON timer
2-8 hours sleep mode
1/f Yuragi (Natural Breeze)
LED lighting- 3 levels of brightness control
DC Motor Technology
Suitable for small and low ceiling room
PPG blade


K15UW 150cm/60"
K15UW-QEY 150cm/60"

Remote control with 9 preset speed
1-8 hours OFF and ON timer
2-8 hours sleep mode
1/f Yuragi (Natural Breeze)
LED lighting- 3 levels of brightness control
DC Motor Technology
Short pipe (245mm) - K15UW-QEY
Long pipe (323mm) - K15UW
PPG blade

K14ZW 140cm/56"
Sensa® 4

Remote control with 9 preset speed
1-8 hours OFF and ON timer
2-8 hours sleep mode
1/f Yuragi (Natural Breeze)
Temperature sensor
DC Motor Technology
PPG blade


K15Z5-QEY 150cm/60"
K15Z5-REY 150cm/60"
Sensa® 5

Remote control with 9 preset speed
1-8 hours OFF and ON timer
2-8 hours sleep mode
1/f Yuragi (Natural Breeze)
Temperature sensor
DC Motor Technology
Short pipe (245mm) - K15Z5-QEY
Long pipe (323mm) - K15Z5-REY
PPG blade


K12YC 120cm/48"
Nodoka® Jr.

Remote control with 10 preset speed
WiFi Smart control with 24 hours sleep mode and ON/OFF timer
1/f Yuragi (Natural Breeze)
Schedule function and Reverse function
New Generation DC (direct current) motor
ABS Glass Fiber blade


K12UC 120cm/48"
Nodoka® Jr.

Remote control with 10 preset speed
WiFi Smart control with 24 hours sleep mode and ON/OFF timer
1/f Yuragi (Natural Breeze)
Schedule function, Scene setting and Reverse function
Stepless control for LED light brightness and color
New Generation DC (direct current) motor
ABS Glass Fiber blade


K15YC 150cm/60"
Nodoka®

Remote control with 10 preset speed
WiFi Smart control with 24 hours sleep mode and ON/OFF timer
1/f Yuragi (Natural Breeze)
Schedule function and Reverse function
New Generation DC (direct current) motor
ABS Glass Fiber blade

K15UC 150cm/60"
Nodoka®

Remote control with 10 preset speed
WiFi Smart control with 24 hours sleep mode and ON/OFF timer
1/f Yuragi (Natural Breeze)
Schedule function, Scene setting and Reverse function
Stepless control for LED light brightness and color
New Generation DC (direct current) motor
ABS Glass Fiber blade

K15YX-QBR 150cm/60"

Remote control with 9 preset speed
1-8 hours OFF and ON timer
2-8 hours sleep mode
1/f Yuragi (Natural Breeze)
DC Motor Technology
Short pipe (245mm)
PPG blade

K15YX-RBR 150cm/60"

Remote control with 9 preset speed
1-8 hours OFF and ON timer
2-8 hours sleep mode
1/f Yuragi (Natural Breeze)
DC Motor Technology
Long pipe (323mm)
PPG blade

K18NY-RBR 180cm/70"
K18NY-SBR 180cm/70"
Moshon®

Remote control with 9 preset speed
2-8 hours sleep mode, 1-8 hours OFF and ON timer
Ball-joint installation
1/f Yuragi (Natural breeze)
Motion Sensor
Twin DC motor technology
Preset fan speed memory function
Short pipe (300mm)
Long pipe (556mm)
PPG blade

K18NY-RBR 180cm/70"
K18NY-SBR 180cm/70"
Moshon®

Remote control with 9 preset speed
2-8 hours sleep mode, 1-8 hours OFF and ON timer
Ball-joint installation
1/f Yuragi (Natural breeze)
Motion Sensor
Twin DC motor technology
Preset fan speed memory function
Short pipe (300mm)
Long pipe (556mm)
PPG blade