

Ceiling Fans  
ALTERNATING CURRENT (AC) MOTOR

K12WO 120cm/48"  
K15WO 150cm/60"  
K15WO-SL 150cm/60"

5 speed  
Wider sweeping blade  
Ideal for small rooms and space  
(Applicable to K12WO only)  
Durable metal blade


K12WO Copper Brown  
K15WO-SL Silver



K12VO 120cm/48"  
K15VO 150cm/60"  
K15VC 150cm/60"

5 speed  
Wider sweeping blade  
Shorter blades for small rooms (K12VO)  
Durable metal blade  
Preassembled fan rod (K15VC)  
Comply with government approved project standard (K15VC)

White

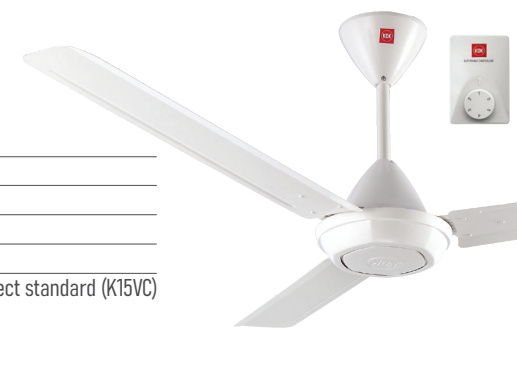

K12VO-PBR 120cm/48"  
K15VO-PBR 150cm/60"

5 speed  
Wider sweeping blade  
Durable metal blade

Brown



K15WO-S 150cm/60"

5 speed  
Wider sweeping blade  
Double hybrid coating treatment  
Suitable for coastal areas  
Durable metal blade

White



K14X2 140cm/56"  
K14X2-PBR 140cm/56"

\*While Stock Last

Remote control with 3 preset speed  
1-6 hours OFF timer  
3-6 hours sleep mode  
Frameless blade design  
Durable metal blade

K14X2 Grey  
K14X2-PBR Brown



K14XF-GY 140cm/56"  
K14XF-BK 140cm/56"

Remote control with 3 preset speed  
1-6 hours OFF timer  
3-6 hours sleep mode  
Durable metal blade

K14XF-GY Grey  
K14XF-BK Black



K14KF-GY 140cm/56"  
K14KF-BK 140cm/56"

Remote control with 3 preset speed  
1-6 hours OFF timer  
3-6 hours sleep mode  
Canopy short pipe design for low ceiling  
Durable metal blade

K14KF-GY Grey  
K14KF-BK Black



K11ZF-GY 110cm/44"  
K11ZF-WT 110cm/44"

Remote control with 3 preset speed  
1-6 hours OFF timer  
3-6 hours sleep mode  
Hook type installation  
Suitable for low ceiling and small space  
PPG blade

K11ZF-GY Grey  
K11ZF-WT White



K14Y2 140cm/56"  
V - Touch® Jr.

Remote control with 5 preset speed  
1-6 hours OFF timer  
3-6 hours sleep mode  
1/f Yuragi (Natural Breeze)  
3D Aero Curve blade design  
PPG blade

Silver Grey



K15Y2-CO 150cm/60"  
K15Y2-GS 150cm/60"  
V - Touch®

Remote control with 5 preset speed  
1-6 hours OFF timer  
3-6 hours sleep mode  
1/f Yuragi (Natural Breeze)  
3D Aero Curve blade design  
PPG blade

K15Y2-CO Copper Bronze  
K15Y2-GS Sterling Grey



K14XZ-GY 140cm/56"  
K14XZ-PBR 140cm/56"  
Z series

Remote control with 3 preset speed  
1-6 hours OFF timer  
3-6 hours sleep mode  
Durable metal blade

K14XZ-GY Grey  
K14XZ-PBR Brown



K14YZ-GY 140cm/56"  
K14YZ-PBR 140cm/56"  
Z series

Remote control with 3 preset speed  
1-6 hours OFF timer  
3-6 hours sleep mode  
Temperature sensor  
DC Motor Technology  
Durable metal blade

K14YZ-PBR Brown  
K14YZ-GY Grey



Ceiling Fans  
DIRECT CURRENT (DC) MOTOR

K14TE-DG 140cm/56"  
DC4™ series

Remote control with 5 preset speed  
1-6 hours OFF timer  
3-6 hours sleep mode  
1/f Yuragi (Natural Breeze)  
DC Motor Technology  
Durable metal blade

Dark Grey



K14TE-WT 140cm/56"  
DC4™ series

Remote control with 5 preset speed  
1-6 hours OFF timer  
3-6 hours sleep mode  
1/f Yuragi (Natural Breeze)  
DC Motor Technology  
Durable metal blade

White



K14QF-DG 140cm/56"  
DC5™ series

Remote control with 5 preset speed  
1-6 hours OFF timer  
3-6 hours sleep mode  
1/f Yuragi (Natural Breeze)  
DC Motor Technology  
Durable metal blade

Dark Grey



K14QF-WT 140cm/56"  
DC5™ series

Remote control with 5 preset speed  
1-6 hours OFF timer  
3-6 hours sleep mode  
1/f Yuragi (Natural Breeze)  
DC Motor Technology  
Durable metal blade

White



K12UX 120cm/48"

Remote control with 9 preset speed  
1-8 hours OFF and ON timer  
2-8 hours sleep mode  
1/f Yuragi (Natural Breeze)  
LED lighting- 3 levels of brightness control  
DC Motor Technology  
Suitable for small and low ceiling room  
PPG blade

Elegant Grey

RECOMMENDED HOOK




K15UW 150cm/60"  
K15UW-QEY 150cm/60"

Remote control with 9 preset speed  
1-8 hours OFF and ON timer  
2-8 hours sleep mode  
1/f Yuragi (Natural Breeze)  
LED lighting- 3 levels of brightness control  
DC Motor Technology  
Short pipe (245mm) - K15UW-QEY  
Long pipe (323mm) - K15UW  
PPG blade

Elegant Grey

RECOMMENDED HOOK

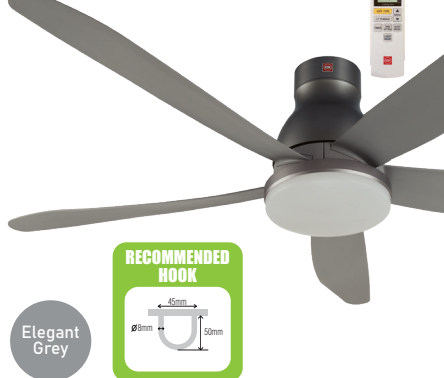

K14ZW 140cm/56"  
Sensa® 4

Remote control with 9 preset speed  
1-8 hours OFF and ON timer  
2-8 hours sleep mode  
1/f Yuragi (Natural Breeze)  
Temperature sensor  
DC Motor Technology  
PPG blade

Elegant Grey

RECOMMENDED HOOK



K15Z5-QEY 150cm/60"  
K15Z5-REY 150cm/60"  
Sensa® 5

Remote control with 9 preset speed  
1-8 hours OFF and ON timer  
2-8 hours sleep mode  
1/f Yuragi (Natural Breeze)  
DC Motor Technology  
Short pipe (245mm) - K15Z5-QEY  
Long pipe (323mm) - K15Z5-REY  
PPG blade

Elegant Grey

RECOMMENDED HOOK



K12YC 120cm/48"  
Nodoka® Jr.

Remote control with 10 preset speed  
WIFI Smart control with 24 hours sleep mode and ON/OFF timer  
1/f Yuragi (Natural Breeze)  
Schedule function and Reverse function  
New Generation DC (direct current) motor  
ABS Glass Fiber blade

Matte Grey

KDK Ceiling Fan CERTIFIED

RECOMMENDED HOOK



K12UC 120cm/48"  
Nodoka® Jr.

Remote control with 10 preset speed  
WIFI Smart control with 24 hours sleep mode and ON/OFF timer  
1/f Yuragi (Natural Breeze)  
Schedule function, Scene setting and Reverse function  
Stepless control for LED light brightness and color  
New Generation DC (direct current) motor  
ABS Glass Fiber blade

Matte Grey

KDK Ceiling Fan CERTIFIED

RECOMMENDED HOOK



K15YC 150cm/60"  
Nodoka®

Remote control with 10 preset speed  
WIFI Smart control with 24 hours sleep mode and ON/OFF timer  
1/f Yuragi (Natural Breeze)  
Schedule function and Reverse function  
New Generation DC (direct current) motor  
ABS Glass Fiber blade

Pearl White

KDK Ceiling Fan CERTIFIED

RECOMMENDED HOOK



K15UC 150cm/60"  
Nodoka®

Remote control with 10 preset speed  
WIFI Smart control with 24 hours sleep mode and ON/OFF timer  
1/f Yuragi (Natural Breeze)  
Schedule function, Scene setting and Reverse function  
Stepless control for LED light brightness and color  
New Generation DC (direct current) motor  
ABS Glass Fiber blade

Pearl White

KDK Ceiling Fan CERTIFIED

RECOMMENDED HOOK



K15YX-QBR 150cm/60"

Remote control with 9 preset speed  
1-8 hours OFF and ON timer  
2-8 hours sleep mode  
1/f Yuragi (Natural Breeze)  
DC Motor Technology  
Short pipe (245mm)  
PPG blade

Brown

RECOMMENDED HOOK



K15YX-RBR 150cm/60"

Remote control with 9 preset speed  
1-8 hours OFF and ON timer  
2-8 hours sleep mode  
1/f Yuragi (Natural Breeze)  
DC Motor Technology  
Long pipe (323mm)  
PPG blade

Brown

RECOMMENDED HOOK




K18NY-RBR 180cm/70"  
K18NY-SBR 180cm/70"  
Moshon®

Remote control with 9 preset speed  
2-8 hours sleep mode, 1-8 hours OFF and ON timer  
Ball-joint installation  
1/f Yuragi (Natural breeze)  
Motion Sensor  
Twin DC motor technology  
Preset fan speed memory function  
Short pipe (300mm)  
Long pipe (556mm)  
PPG blade

Dark Brown

NO HOOK REQUIRED

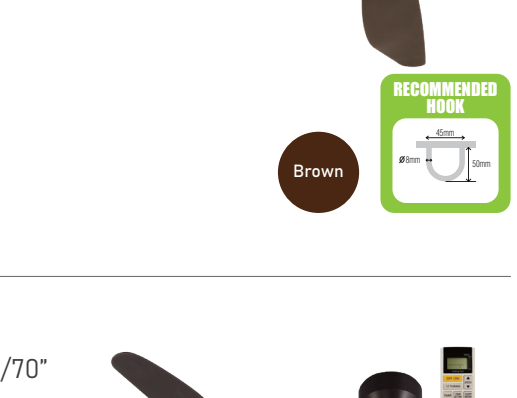

## Auto Fan

KQ409 40cm/16"

5 speed  
360° oscillation  
Adjustment angles 15°, 30°, 50°



## Table Fans

KB-304 30cm/12"  
KB-404 40cm/16"

3 speed on/off push button switch  
Full automatic oscillation  
Clutch control

Silver Blue  
Beige  
Flame Red



## Stand Fans

KX-405 40cm/16"

3 speed on/off push button switch  
Full automatic oscillation  
Clutch control  
Flexible neck adjustment

Deep Red  
Metal Grey



## Remote Control Wall Fan

KC-4GR 40cm/16"

Remote control with 3 preset speed  
1-6 hours timer  
Manual on/off and oscillation control  
Soft touch control panel



## Wall Fans

KU308 30cm/12"  
KU408 40cm/16"  
KU408 YG 40cm/16"  
KU453 45cm/18"  
KV408 40cm/16"

3-speed On/Off pull switch  
Oscillation Control by pull switch  
Flexible neck adjustment  
Silver color blade for better durability  
(Applicable to KV408 only)

White  
KU408 YG & KV408 Grey



## Commercial Wall Fan

KU50Y 50cm/20"  
KU50Y-DG 50cm/20"

3 speed ON/OFF pull switch  
Full automatic oscillation  
Aluminium blade for stronger airflow and durability  
Turbo Fin Guard design generates airflow up to 10 meter distance  
New Front Guard Locking System  
Added angle adjust bolt for extra stability

KU50Y White  
KU50Y-DG Dark Grey



## Ceiling Mounted Ventilating Fans

15TGQZ 15cm/6"  
20CQT1 20cm/8" \* While Stock Last  
20TGQF 20cm/8" \* Available by November 2023  
25TGQ7 25cm/10"

Q-blade design  
High efficiency airflow  
Durable and long lasting operation  
Low noise and energy saving



## Ceiling Mounted Sirocco Ventilating Fans

17CUH  
24CUH

Low Noise with Resonance Absorption Structure  
Taper blade design for high performance  
HP (half pitch) motor with ball bearing for better durability  
Curve-shaped backdraft shutter



17CUBM  
24CUBM  
24CGBM

Low Noise with Resonance Absorption Structure  
Taper blade design for high performance  
HP (half pitch) motor with ball bearing for better durability  
Curve-shaped backdraft shutter



## Glass Mounted Ventilating Fans

15WUD 15cm/6"  
20WUD 20cm/8"

Advanced blade design  
Ball bearing condenser motor  
Pull cord operated shutter  
Fit window panel thickness 3mm to 7mm  
Low noise  
Suitable for bathrooms



## Wall Mounted Ventilating Fans

10EGKA 10cm/4"

Excellent for bathroom  
Easy installation  
Equipped with full accessories  
Easy Cleaning  
Energy saving  
Exhaust moisture and odour, preventing mould

\* While Stocks Last



25AUFA 25cm/10"  
Raku-Raku\*

Advanced blade design  
High exhaust performance  
Aluminium punching filter with non-stick coating  
Oil container with collected oil level indicator  
Suitable for kitchen use

\* While Stocks Last



## Wall Mounted Ventilating Fans

15AAQ1 15cm/6"  
20AQM8 20cm/8"  
25AQM7 25cm/10"  
30AQM8 30cm/12"

Q-blade design  
High efficiency airflow  
Durable and long lasting operation  
Low noise and energy saving  
Automatic shutter



20ALA 20cm/8"  
25ALA 25cm/10"

Curve shape front louver design  
Aerodynamic blade design  
High efficiency airflow  
Ball bearing type motor for durability  
Low noise and energy saving  
Automatic shutter



40KAQA 40cm/16"

Large metal blade assembly for abundant air volume  
Powerful, efficient and durable condenser motor  
Possible to install horizontally  
Automatic shutter  
Ideal for factories, warehouse, restaurant, workshop



## Specifications

| Model               | RPM       |           | Capacity (CFM) | Wattage   |           | Noise Level (dB) | Operating Weight (kg) |
|---------------------|-----------|-----------|----------------|-----------|-----------|------------------|-----------------------|
|                     | Low       | High      |                | Low       | High      |                  |                       |
| K12W0               | 131-177   | 273-333   | 5721           | 15.1-20.5 | 47.7-58.3 | <58              | 4.80                  |
| K15W0 / SL          | 81-118    | 216-264   | 8122           | 14.7-19.9 | 67.5-82.5 | <62              | 5.30                  |
| K15V0 / PBR / K15VC | 81-118    | 216-264   | 8122           | 14.7-19.9 | 67.5-82.5 | <62              | 5.10                  |
| K12V0 / PBR         | 131-177   | 273-333   | 5721           | 15.1-20.5 | 47.7-58.3 | <58              | 4.60                  |
| K15W0-S             | 81-118    | 216-264   | 8122           | 14.7-19.9 | 67.5-82.5 | <62              | 5.50                  |
| K14X2 / PBR         | 113       | 257       | 7416           | 33.5      | 65.0      | 51.0             | 5.10                  |
| K14XF-6Y / BK       | 136       | 268       | 7416           | 20.0      | 65.0      | 56.0             | 5.20                  |
| K14XF-6Y / BK       | 136       | 268       | 7416           | 20.0      | 65.0      | 56.0             | 5.20                  |
| K11ZF-6Y / WT       | 133       | 239       | 6003           | 20.0      | 58.0      | 49.5             | 5.20                  |
| K14Y2               | 102       | 215       | 7946           | 17.8      | 85.0      | 52.0             | 6.40                  |
| K15Y2-CB / GS       | 84        | 195       | 7946           | 20.5      | 85.0      | 48.0             | 7.40                  |
| K14XZ-6Y / PBR      | 102       | 196       | 7593           | 20.0      | 68.0      | 51.0             | 7.00                  |
| K14Y2-6Y / PBR      | 95        | 183       | 7593           | 21.0      | 69.0      | 51.0             | 7.60                  |
| K14TE-0G / WT       | 80        | 200       | 7769           | 4.0       | 29.0      | 54.0             | 5.10                  |
| K14QF-0G / WT       | 80        | 175       | 7769           | 4.0       | 29.0      | 54.0             | 5.70                  |
| K12UX               | 80        | 236       | 6603           | 3.0       | 46.0      | 50.0             | 4.90                  |
| K15UW / QEY         | 80        | 235       | 8652           | 3.0       | 63.0      | 53.0             | 6.20 / 6.00           |
| K14ZW               | 81        | 239       | 7946           | 2.5       | 41.0      | 51.0             | 4.90                  |
| K15Z5-QEY/ REY      | 80        | 235       | 8652           | 3.0       | 41.0      | 54.0             | 5.10 / 5.30           |
| K12YC               | 55        | 170       | 7063           | 3.0       | 31.0      | 41.0             | 4.90                  |
| K12UC               | 55        | 170       | 7063           | 3.0       | 50.0      | 41.0             | 5.20                  |
| K15YC               | 80        | 245       | 10594          | 4.0       | 54.0      | 59.0             | 7.00                  |
| K15UC               | 80        | 245       | 10594          | 4.0       | 73.0      | 59.0             | 7.30                  |
| K15YX-QBR / RBR     | 80        | 235       | 8652           | 3.0       | 41.0      | 54.0             | 5.10 / 5.30           |
| K18YX-RBR / SBR     | 80        | 185       | 11477          | 6.0       | 55.0      | 54.0             | 11.70 / 11.90         |
| KQ409               | 568-694   | 1089-1331 | 3002           | 18.3-22.4 | 46.8-57.2 | <60              | 3.90                  |
| KB-304              | 878-1074  | 1123-1373 | 1518           | 25.2-30.8 | 34.7-42.5 | <47              | 3.20                  |
| KB-404              | 774-946   | 1103-1349 | 2225           | 38.9-47.5 | 49.9-60.9 | <60              | 4.30                  |
| KX-405              | 765-935   | 1089-1331 | 2225           | 40.8-49.8 | 52.2-63.8 | <60              | 8.30                  |
| KC-4GR              | 774-946   | 1103-1349 | 2225           | 43.0-52.7 | 53.4-65.2 | <60              | 4.60                  |
| KU308               | 871-1065  | 1158-1416 | 1589           | 30.0-36.6 | 39.8-48.6 | <50              | 3.30                  |
| KU408 / YG          | 774-946   | 1103-1349 | 2225           | 38.9-47.5 | 49.9-60.9 | <60              | 4.45                  |
| KV408               | 839-1025  | 1135-1387 | 2225           | 38.3-46.8 | 48.2-59.0 | <60              | 4.55                  |
| KU453               | 730-892   | 961-1175  | 3355           | 41.6-50.8 | 54.2-66.3 | <60              | 5.00                  |
| KU50Y / DG          | 940       | 1280      | 3885           | 60.0      | 70.0      | 59.0             | 6.00                  |
| 15TGQZ              | 1330      |           | 141            | 12        |           | 35.0             | 1.20                  |
| 20CQT1              | 1207      |           | 265            | 25.7      |           | 41.0             | 1.80                  |
| 20TGQF              | 1250      |           | 312            | 20.0      |           | 41.0             | 1.30                  |
| 25TGQ7              | 959-1172  |           | 367            | 24.8-30.3 |           | 45.0             | 1.90                  |
| 17CUH               | 680       |           | 53             | 9.5       |           | 26.0             | 1.70                  |
| 24CUH               | 530       |           | 94             | 12.0      |           | 27.0             | 2.70                  |
| 17CUBM              | 800       |           | 53             | 9.5       |           | 24.0             | 1.90                  |
| 24CUBM              | 680       |           | 94             | 12.0      |           | 26.0             | 2.90                  |
| 24CGBM              | 995       |           | 129            | 25.5      |           | 38.0             | 2.90                  |
| 15WUD               | 1463      |           | 124            | 8.0       |           | 35.0             | 0.90                  |
| 20WUD               | 1042      |           | 212            | 16.0      |           | 32.0             | 1.10                  |
| 10EGKA              | 2732      |           | 45             | 6.4       |           | 33.0             | 1.20                  |
| 15EGKA              | 2405      |           | 96             | 6.9       |           | 35.0             | 1.50                  |
| 25AUFA              | 1100      |           | 491            | 34.0      |           | 42.0             | 2.80                  |
| 15AAQ1              | 1480      |           | 170            | 15.0      |           | 31.0             | 1.40                  |
| 20AQM8              | 1109-1301 |           | 318            | 14.9-18.3 |           | 37.0             | 2.30                  |
| 25AQM7              | 999-1221  |           | 530            | 25.2-30.8 |           | 39.0             | 2.60                  |
| 30AQM8              | 925-1085  |           | 727            | 31.8-38.8 |           | 45.0             | 3.00                  |
| 20ALA               | 1280      |           | 323            | 18        |           | 38.0             | 2.00                  |
| 25ALA               | 1210      |           | 494            | 25        |           | 40.5             | 2.50                  |
| 40KAQA              | 1410      |           | 1155           | 66        |           | 51.0             | 6.40                  |


\* Specifications are subject to change without prior notice.  
\*\* Actual products & colours may vary from pictures shown.  
\*\*\* All KDK fans come with Thermal Safety Fuse.



**KDK**  
SINCE 1909  
JAPAN

**KDK FANS (M) SDN BHD** (Company No: 200201001186/568649-X)  
3rd Floor, 15 Jalan Tandang, 46050 Petaling Jaya, Selangor.  
Tel : 03-7785 5011  
Fax : 03-7785 2655  
Website: www.kdk.com.my

MP-23-C

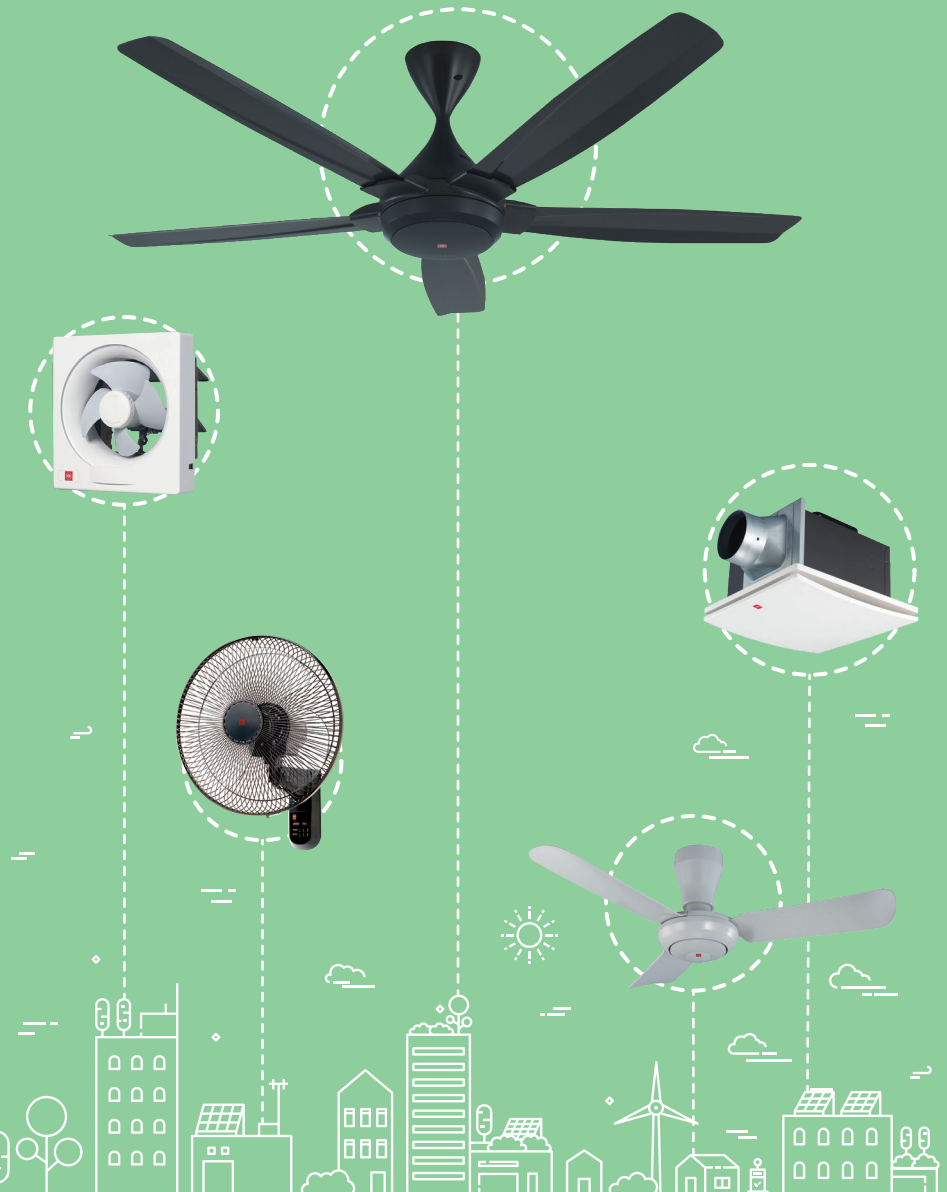

3<sup>rd</sup> Edition  
**2023 / 2024**