


Table Fans


KB-304 30cm/12"
KB-404 40cm/16"

Silver Blue Beige Flame Red

- 3 speed on/off push button switch
- Full automatic oscillation
- Clutch control

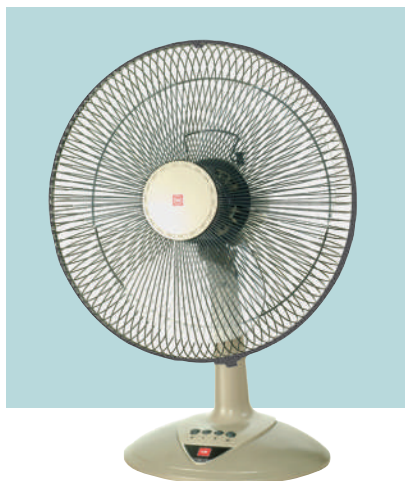

Stand Fans

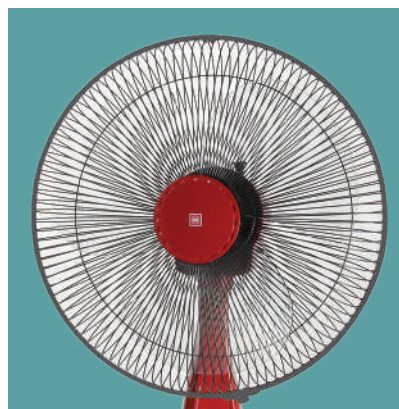

KX-405 40cm/16"

Deep Red Metal Grey

- 3 speed on/off push button switch
- Full automatic oscillation
- Clutch control
- Flexible neck adjustment

Remote Control Wall Fan

KC-4GR 40cm/16"

- Remote control with 3 preset speed
- 1-6 hours timer
- Manual on/off and oscillation control
- Soft touch control panel



Wall Fans



KU308 30cm/12"
KU408 40cm/16"
KU408 YG 40cm/16"
KU453 45cm/18"
KV408 40cm/16"

KU408 YG & KV408 Grey White

- 3-speed On/Off pull switch
- Oscillation Control by pull switch
- Flexible neck adjustment
- Silver color blade for better durability (Applicable to KV408 only)

Commercial Wall Fan

KU50Y 50cm/20"
KU50Y-DG 50cm/20"

KU50Y White KU50Y-DG Dark Grey

- 3 speed ON/OFF pull switch
- Full automatic oscillation
- Aluminium blade for stronger airflow and durability
- Turbo Fin Guard design generates airflow up to 10 meter distance
- New Front Guard Locking System
- Added angle adjust bolt for extra stability



Auto Fan

KQ409 40cm/16"

- 5 speed
- 360° oscillation
- Adjustment angles 15°, 30°, 50°



Glass Mounted Ventilating Fans



15WUD 15cm/6"
20WUD 20cm/8"

- Advanced blade design
- Ball bearing condenser motor
- Pull cord operated shutter
- Fit window panel thickness 3mm to 7mm
- Low noise
- Suitable for bathrooms

Wall Mounted Ventilating Fans

10EGKB 10cm/4"
15EGKB 15cm/6"


- Excellent for bathroom
- Easy installation
- Equipped with full accessories
- Easy Cleaning
- Energy saving
- Exhaust moisture and odour, preventing mould



Ceiling Mounted Ventilating Fans

15TGQZ 15cm/6"
20TGQF 20cm/8"
25TGQ7 25cm/10"

- 0-blade design
- High efficiency airflow
- Durable and long lasting operation
- Low noise and energy saving

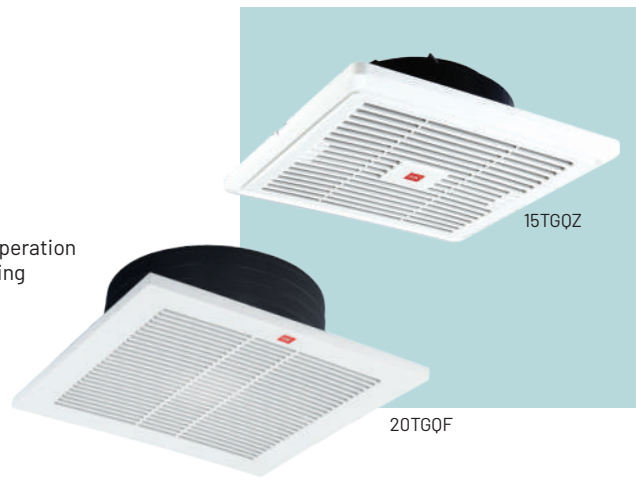

Ceiling Mounted Sirocco Ventilating Fans



17CUH 17cm/6"
24CUH 24cm/10"

- Low Noise with Resonance Absorption Structure
- Taper blade design for high performance
- HP (half pitch) motor with ball bearing for better durability
- Curve-shaped backdraft shutter

17CUBM 17cm/6"
24CUBM 24cm/10"
24CGBM 24cm/10"

- Low Noise with Resonance Absorption Structure
- Taper blade design for high performance
- HP (half pitch) motor with ball bearing for better durability
- Curve-shaped backdraft shutter



Wall Mounted Ventilating Fans

15AAQ1 15cm/6"
20AQM8 20cm/8"
25AQM7 25cm/10"
30AQM8 30cm/12"

- 0-blade design
- High efficiency airflow
- Durable and long lasting operation
- Low noise and energy saving
- Automatic shutter



20ALA 20cm/8"
25ALA 25cm/10"

- Curve shape front louver design
- Aerodynamic blade design
- High efficiency airflow
- Ball bearing type motor for durability
- Low noise and energy saving
- Automatic shutter

40KAQA 40cm/16"

- Large metal blade assembly for abundant air volume
- Powerful, efficient and durable condenser motor
- Possible to install horizontally
- Automatic shutter
- Ideal for factories, warehouse, restaurant, workshop



Specifications

Model	RPM		Capacity (CFM)	Wattage		Noise Level (dB)	Operating Weight (kg)
	Low	High		Low	High		
K12WO	131-177	273-333	5721	15.1-20.5	47.7-58.3	<58	4.80
K15WO / SL	81-118	216-264	8122	14.7-19.9	67.5-82.5	<62	5.30
K15VO / PBR / K15VC	81-118	216-264	8122	14.7-19.9	67.5-82.5	<62	5.10
K12VO / PBR	131-177	273-333	5721	15.1-20.5	47.7-58.3	<58	4.60
K15WO-S	81-118	216-264	8122	14.7-19.9	67.5-82.5	<62	5.50
K11ZF-GY / WT	133	239	6003	20.0	58.0	49.5	5.20
K14Y2	102	215	7946	17.8	85.0	52.0	6.40
K15Y2-CO / GS	84	195	7946	20.5	85.0	48.0	7.40
K14XF-GY / BK	136	268	7416	20.0	65.0	56.0	5.20
K14KF-GY / BK	136	268	7416	20.0	65.0	56.0	5.20
K14XZ-GY / PBR	102	196	7593	20.0	68.0	51.0	7.00
K14YZ-GY / PBR	95	183	7593	21.0	69.0	51.0	7.60
K14TE-DG / WT	80	200	7769	4.0	29.0	54.0	5.10
K14OF-DG / WT	80	175	7769	4.0	29.0	54.0	5.70
K12UX	80	236	6603	3.0	46.0	50.0	4.90
K15UW / OEY	80	235	8652	3.0	63.0	53.0	6.20 / 6.00
K14ZW	81	239	7946	2.5	41.0	51.0	4.90
K15Z5-OEY / REY	80	235	8652	3.0	41.0	54.0	5.10 / 5.30
K12YC	55	170	7063	3.0	31.0	41.0	4.90
K12UC	55	170	7063	3.0	50.0	41.0	5.20
K15YC	80	245	10594	4.0	54.0	59.0	7.00
K15UC	80	245	10594	4.0	73.0	59.0	7.30
K15YX-OBR / RBR	80	235	8652	3.0	41.0	54.0	5.10 / 5.30
K18NY-RBR / SBR	80	185	11477	6.0	55.0	54.0	11.70 / 11.90
KB-304	878-1074	1123-1373	1518	25.2-30.8	34.7-42.5	<47	3.20
KB-404	774-946	1103-1349	2225	38.9-47.5	49.9-60.9	<60	4.30
KX-405	765-935	1089-1331	2225	40.8-49.8	52.2-63.8	<60	8.30
KC-4GR	774-946	1103-1349	2225	43.0-52.7	53.4-65.2	<60	4.60
KU308	871-1065	1158-1416	1589	30.0-36.6	39.8-48.6	<50	3.30
KU408 / YG	774-946	1103-1349	2225	38.9-47.5	49.9-60.9	<60	4.45
KV408	839-1025	1135-1387	2225	38.3-46.8	48.2-59.0	<60	4.55
KU453	730-892	961-1175	3355	41.6-50.8	54.2-66.3	<60	5.00
KU50Y / DG	940	1280	3885	60.0	70.0	59.0	6.00
KQ409	568-694	1089-1331	3002	18.3-22.4	46.8-57.2	<60	3.90
15WUD	1463	124	124	8.0	35.0	0.90	
20WUD	1042	212	212	16.0	32.0	1.10	
10EGKB	2690	45	45	5.0	33.0	1.00	
15EGKB	2390	97	97	6.5	37.0	1.30	
15TGQZ	1330	141	141	12	35.0	1.20	
20TGQF	1250	312	312	20.0	41.0	1.30	
25TGQ7	959-1172	367	367	24.8-30.3	45.0	1.90	
17CUH	680	53	53	9.5	26.0	1.70	
24CUH	530	94	94	12.0	27.0	2.70	
17CUBM	800	53	53	9.5	24.0	1.90	
24CUBM	680	94	94	12.0	26.0	2.90	
24CGBM	995	129	129	25.5	38.0	2.90	
15AAQ1	1480	170	170	15.0	31.0	1.40	
20AQM8	1109-1301	318	318	14.9-18.3	37.0	2.30	
25AQM7	999-1221	530	530	25.2-30.8	39.0	2.60	
30AQM8	925-1085	727	727	31.8-38.8	45.0	3.00	
20ALA	1280	323	323	18	38.0	2.00	
25ALA	1210	494	494	25	40.5	2.50	
40KAQA	1410	1155	1155	66	51.0	6.40	

* Specifications are subject to change without prior notice.
** Actual products & colours may vary from pictures shown.
*** All KDK fans come with Thermal Safety Fuse.



KDK FANS (M) SDN BHD (Company No: 200201001186/568849-X)
3rd Floor, 15 Jalan Tandang, 46050 Petaling Jaya, Selangor.
Tel : 03-7785 5011
Fax : 03-7785 2655
Website: www.kdk.com.my

MP-24-A



Ceiling Fans

Alternating Current (AC) Motor

K12W0 120cm/48"
K15W0 150cm/60"
K15W0-SL 150cm/60"

K15W0-SL Silver **K12W0 / K15W0 Copper Brown**



- 5 speed
- Wider sweeping blade
- Ideal for small rooms and space (Applicable to K12W0 only)
- Durable metal blade

K12VO 120cm/48"
K15VO 150cm/60"
K15VC 150cm/60"

White



- 5 speed
- Wider sweeping blade
- Shorter blades for small rooms (K12VO)
- Durable metal blade
- Preassembled fan rod (K15VC)
- Comply with government approved project standard (K15VC)

K12VO-PBR 120cm/48"
K15VO-PBR 150cm/60"

Brown



- 5 speed
- Wider sweeping blade
- Durable metal blade

K15W0-S 150cm/60"

White



- 5 speed
- Wider sweeping blade
- Double hybrid coating treatment
- Suitable for coastal areas
- Durable metal blade

K11ZF-GY 110cm/44"
K11ZF-WT 110cm/44"

K11ZF-GY Grey **K11ZF-WT White**



- Remote control with 3 preset speed
- 1-6 hours OFF timer
- 3-6 hours sleep mode
- Hook type installation
- Suitable for low ceiling and small space
- PPG blade

K14Y2 140cm/56"
V-Touch® Jr.

Silver Grey



- Remote control with 5 preset speed
- 1-6 hours OFF timer
- 3-6 hours sleep mode
- 1/f Yuragi (Natural Breeze)
- 3D Aero Curve blade design
- PPG blade

K15Y2-CO 150cm/60"
V-Touch®

K15Y2-CO Copper Bronze



- Remote control with 5 preset speed
- 1-6 hours OFF timer
- 3-6 hours sleep mode
- 1/f Yuragi (Natural Breeze)
- 3D Aero Curve blade design
- PPG blade

K15Y2-GS 150cm/60"
V-Touch®

K15Y2-GS Silver Grey



- Remote control with 5 preset speed
- 1-6 hours OFF timer
- 3-6 hours sleep mode
- 1/f Yuragi (Natural Breeze)
- 3D Aero Curve blade design
- PPG blade

K14XF-GY 140cm/56"
K14XF-BK 140cm/56"

K14XF-GY Grey **K14XF-BK Black**



- Remote control with 3 preset speed
- 1-6 hours OFF timer
- 3-6 hours sleep mode
- Durable metal blade

K14KF-GY 140cm/56"
K14KF-BK 140cm/56"

K14KF-GY Grey **K14KF-BK Black**



- Remote control with 3 preset speed
- 1-6 hours OFF timer
- 3-6 hours sleep mode
- DC Motor Technology
- Durable metal blade

K14XZ-GY 140cm/56"
K14XZ-PBR 140cm/56"
Z series

K14XZ-GY Grey **K14XZ-PBR Brown**



- Remote control with 3 preset speed
- 1-6 hours OFF timer
- 3-6 hours sleep mode
- Durable metal blade

K14YZ-GY 140cm/56"
K14YZ-PBR 140cm/56"
Z series

K14YZ-PBR Brown **K14YZ-GY Grey**



- Remote control with 3 preset speed
- 1-6 hours OFF timer
- 3-6 hours sleep mode
- Durable metal blade

Ceiling Fans

Direct Current (DC) Motor

K14TE-DG 140cm/56"
DC4™ series

Dark Grey



- Remote control with 5 preset speed
- 1-6 hours OFF timer
- 3-6 hours sleep mode
- 1/f Yuragi (Natural Breeze)
- DC Motor Technology
- Durable metal blade

K14TE-WT 140cm/56"
DC4™ series

White



- Remote control with 5 preset speed
- 1-6 hours OFF timer
- 3-6 hours sleep mode
- 1/f Yuragi (Natural Breeze)
- DC Motor Technology
- Durable metal blade

K14QF-DG 140cm/56"
DC5™ series

Dark Grey



- Remote control with 5 preset speed
- 1-6 hours OFF timer
- 3-6 hours sleep mode
- 1/f Yuragi (Natural Breeze)
- DC Motor Technology
- Durable metal blade

K14QF-WT 140cm/56"
DC5™ series

White



- Remote control with 5 preset speed
- 1-6 hours OFF timer
- 3-6 hours sleep mode
- 1/f Yuragi (Natural Breeze)
- DC Motor Technology
- Durable metal blade

K12UX 120cm/48"

Elegant Grey



- Remote control with 9 preset speed
- 1-8 hours OFF and ON timer
- 2-8 hours sleep mode
- 1/f Yuragi (Natural Breeze)
- LED lighting- 3 levels of brightness control
- DC Motor Technology
- Suitable for small and low ceiling room
- PPG blade

K15UW 150cm/60"
K15UW-QEY 150cm/60"

Elegant Grey



- Remote control with 9 preset speed
- 1-8 hours OFF and ON timer
- 2-8 hours sleep mode
- 1/f Yuragi (Natural Breeze)
- LED lighting- 3 levels of brightness control
- DC Motor Technology
- Short pipe (245mm) - K15UW-QEY
- Long pipe (323mm) - K15UW
- PPG blade

K14ZW 140cm/56"
Sensa® 4

Elegant Grey



- Remote control with 9 preset speed
- 1-8 hours OFF and ON timer
- 2-8 hours sleep mode
- 1/f Yuragi (Natural Breeze)
- Temperature sensor
- DC Motor Technology
- PPG blade

K15Z5-QEY 150cm/60"
K15Z5-REY 150cm/60"
Sensa® 5

Elegant Grey



- Remote control with 9 preset speed
- 1-8 hours OFF and ON timer
- 2-8 hours sleep mode
- 1/f Yuragi (Natural Breeze)
- Temperature sensor
- DC Motor Technology
- Short pipe (245mm) - K15Z5-QEY
- Long pipe (323mm) - K15Z5-REY
- PPG blade

K12YC 120cm/48"
Nodoka® Jr.

Matte Grey **KDK Ceiling Fan** **WiFi CERTIFIED**



- Remote control with 10 preset speed
- WIFI Smart control with 24 hours sleep mode and ON/OFF timer
- 1/f Yuragi (Natural Breeze)
- Schedule function and Reverse function
- New Generation DC (direct current) motor
- ABS Glass Fiber blade

K12UC 120cm/48"
Nodoka® Jr.

Matte Grey **KDK Ceiling Fan** **WiFi CERTIFIED**



- Remote control with 10 preset speed
- WIFI Smart control with 24 hours sleep mode and ON/OFF timer
- 1/f Yuragi (Natural Breeze)
- Schedule function, Scene setting and Reverse function
- Stepless control for LED light brightness and color
- New Generation DC (direct current) motor
- ABS Glass Fiber blade

K15YC 150cm/60"
Nodoka®

Pearl White **KDK Ceiling Fan** **WiFi CERTIFIED**



- Remote control with 10 preset speed
- WIFI Smart control with 24 hours sleep mode and ON/OFF timer
- 1/f Yuragi (Natural Breeze)
- Schedule function and Reverse function
- New Generation DC (direct current) motor
- ABS Glass Fiber blade

K15UC 150cm/60"
Nodoka®

Pearl White **KDK Ceiling Fan** **WiFi CERTIFIED**



- Remote control with 10 preset speed
- WIFI Smart control with 24 hours sleep mode and ON/OFF timer
- 1/f Yuragi (Natural Breeze)
- Motion Sensor
- Schedule function, Scene setting and Reverse function
- Stepless control for LED light brightness and color
- New Generation DC (direct current) motor
- ABS Glass Fiber blade

K15YX-QBR 150cm/60"

Brown



- Remote control with 9 preset speed
- 1-8 hours OFF and ON timer
- 2-8 hours sleep mode
- 1/f Yuragi (Natural Breeze)
- DC Motor Technology
- Short pipe (245mm)
- PPG blade

K15YX-RBR 150cm/60"

Brown



- Remote control with 9 preset speed
- 1-8 hours OFF and ON timer
- 2-8 hours sleep mode
- 1/f Yuragi (Natural Breeze)
- DC Motor Technology
- Long pipe (323mm)
- PPG blade

K18NY-RBR 180cm/70"
K18NY-SBR 180cm/70"
Moshon®

Dark Brown



- Remote control with 9 preset speed
- 2-8 hours sleep mode, 1-8 hours OFF and ON timer
- Ball-joint installation
- 1/f Yuragi (Natural breeze)
- Motion Sensor
- Twin DC motor technology
- Preset fan speed memory function
- Short pipe (300mm)
- Long pipe (556mm)
- PPG blade