



SINCE 1909
JAPAN



2025-2026
2nd Edition



Table of Contents

Ceiling Fans

01.



Wall Fans

21.



Commercial Wall Fans

23.



Auto Fan

24.



Glass Mounted Ventilating Fans

25.



Wall Mounted Ventilating Fans

26.



Ceiling Mounted Ventilating Fans

29.



Ceiling Mounted Sirocco Ventilating Fans

30.



High Pressure Industrial Ventilating Fans

33.



Industrial Ventilating Fan

35.



Accessories

36.



Safety Features For Ceiling Fans



Safety Wire

Safety Wire secures the fan motor to the ceiling hook.



Cut-off Safety Switch


Cut off power supply while detecting dangerous wear and tear of the shaft or bolt.



Blade Safety Plate (applicable to all ceiling fans)

In the event of breakage of the blade frame, the Blade Safety Plate will hold the blade to the motor.

Regulator Ceiling Fans (AC Motor)

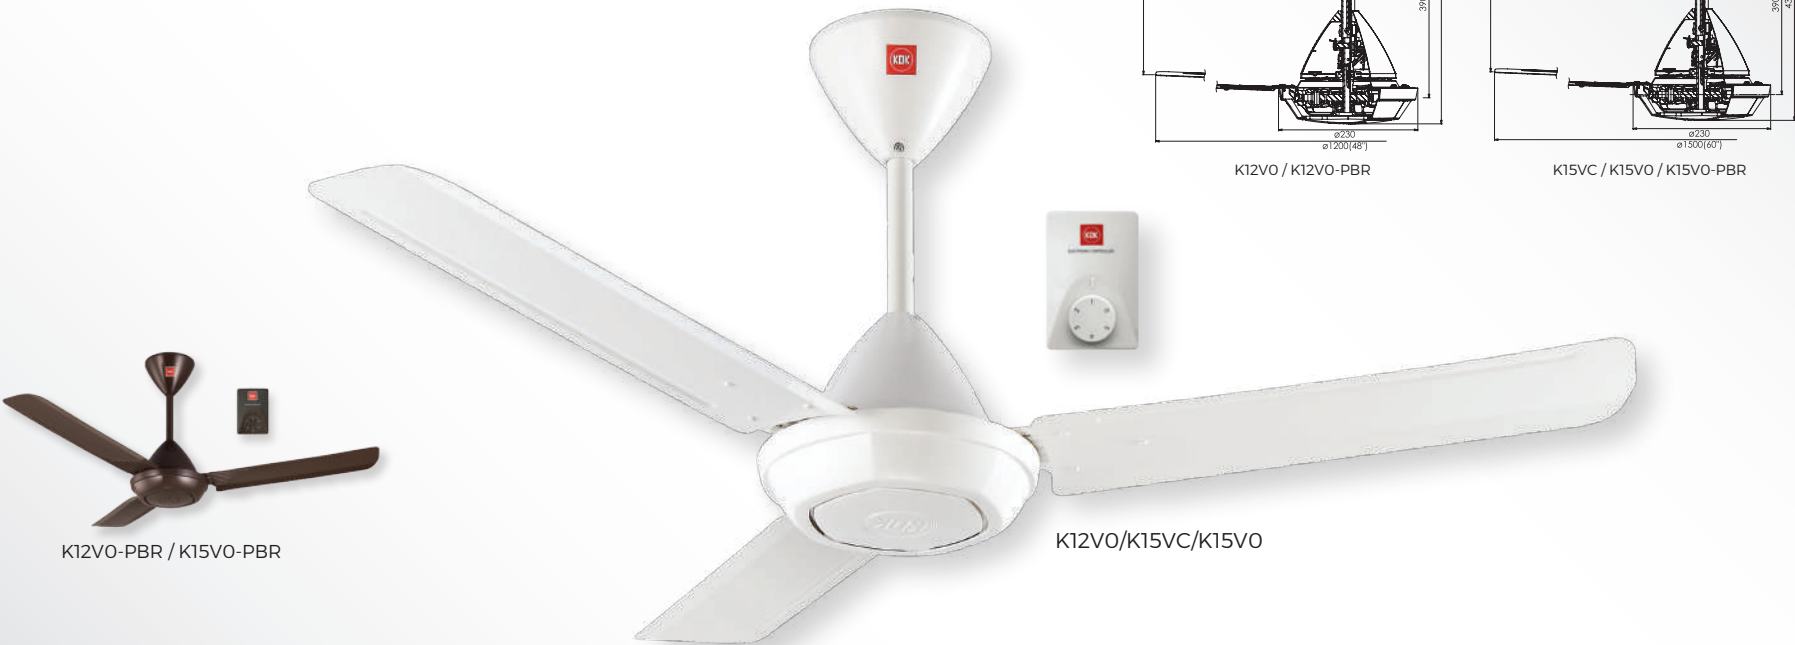

K12V0-PBR / K15V0-PBR

K12V0/K15VC/K15V0

- 

Hexagon decorative cover
- 

Embossed logo deco cover
- 

Energy saving condenser motor
- 

Durable metal blades
- 

Meets C.O.P requirements (Co-Efficient of Performance)
- 

Preassembled fan rod (applicable to K15VC)
- 




Optional extended fan rod (refer page 36)
- 

Comply with government project standard (applicable to K15VC)

Specifications

Model	Color	No. of Blade	Dimension	Energy Star Rating	RPM		CFM	Motor W		Motor HP	Motor Type	Noise Level (dB)	Nett Weight (kg)
					Low	High		Low	High				
K12V0	White	3	48"/120cm	5	131-177	273-333	5721	19	54	0.08	14 Pole Condenser	<58	4.60
K12V0-PBR	Brown												
K15VC	White												
K15V0	White												
K15V0-PBR	Brown		60"/150cm		81-118	216-264	8122	17	72	0.10		<62	5.10

Regulator Ceiling Fans (AC Motor)

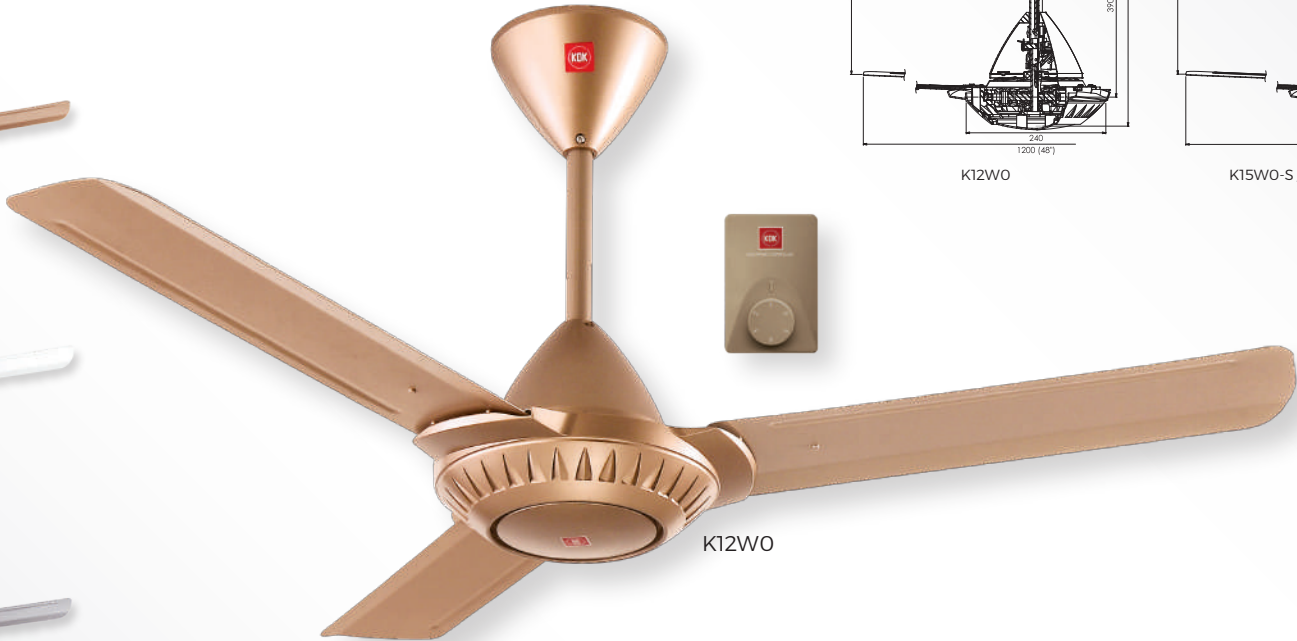

Treated with double hybrid coating treatment for added protection and reliability.
It is ideal for coastal areas, where the air is salty and corrosive.
(Applicable to K15W0-S only)



Meets C.O.P requirements
(Co-Efficient of Performance)



Energy saving
condenser motor



Durable
metal blades

Specifications

Model	Color	No. of Blade	Dimension	Energy Star Rating	RPM		CFM	Motor W		Motor HP	Motor Type	Noise Level (dB)	Nett Weight (kg)
					Low	High		Low	High				
K12W0	Copper Brown	3	48"/120cm	5	131-177	273-333	5721	15.1-20.5	47.7-58.3	0.08	14 Pole Condenser	<58	4.80
K15W0-S	White		60"/150cm		81-118	216-264	8122	14.7-19.9	67.5-82.5	0.10		<62	5.50
K15W0	Copper Brown												5.30
K15W0-SL	Silver												

Remote Control Ceiling Fans (AC Motor)



-  Canopy Short Pipe design for low ceiling room
-  Remote control with 3 preset speed, 1, 3, 6 hours OFF timer and sleep mode
-  Durable metal blades

Specifications

Model	Color	No. of Blade	Dimension	Energy Star Rating	RPM		CFM	Motor W		Motor HP	Motor Type	Noise Level (dB)	Nett Weight (kg)
					Low	High		Low	High				
K14KF-BK	Black	3	56"/140cm	5	136	268	7416	20	65	0.09	AC	56	5.20
K14KF-GY	Grey												

Remote Control Ceiling Fans (AC Motor)




Remote control with
3 preset speed,
1, 3, 6 hours OFF timer
and sleep mode


Durable
metal blades



Optional extended
fan rod
(refer page 36)

Specifications

Model	Color	No. of Blade	Dimension	Energy Star Rating	RPM		CFM	Motor W		Motor HP	Motor Type	Noise Level (dB)	Nett Weight (kg)
					Low	High		Low	High				
K14XF-GY	Grey	3	56"/140cm	5	136	268	7416	20	65	0.09	AC	56	5.20
K14XF-BK	Black												

Remote Control Ceiling Fans (AC Motor)

V-Touch® Series

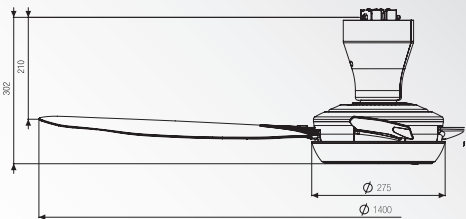

K14Y2



K14Y2 (V-Touch® Jr.)



Remote control with 5 preset speed, 3-6 hours sleep mode and 1-6 hours OFF timer



Equipped with 1/f Yuragi feature (Natural Breeze)



3D Aero Curve blade design



Distinctive blade material (PPG) for better durability, rust and dent resistance



Modern deco design with Japan Film Injection Technology

Specifications

Model	Color	No. of Blade	Dimension	Energy Star Rating	RPM		CFM	Motor W		Motor HP	Motor Type	Noise Level (dB)	Nett Weight (kg)
					Low	High		Low	High				
K14Y2	Silver Grey	4	56"/140cm	3	102	215	7946	17.8	85	0.11	AC	52	6.40

Remote Control Ceiling Fans (AC Motor)

V-Touch® Series



K15Y2-GS (V-Touch®)

K15Y2-CO (V-Touch®)



Remote control with
5 preset speed,
3-6 hours
sleep mode and
1-6 hours OFF timer



Equipped with
1/f Yuragi feature
(Natural Breeze)



3D Aero Curve
blade design



Distinctive blade
material (PPG) for
better durability,
rust and
dent resistance




Modern deco design
with Japan Film
Injection Technology

Specifications

Model	Color	No. of Blade	Dimension	Energy Star Rating	RPM		CFM	Motor W		Motor HP	Motor Type	Noise Level (dB)	Nett Weight (kg)
					Low	High		Low	High				
K15Y2-CO	Copper Bronze	5	60"/150cm	4	84	195	7946	20.5	85	0.11	AC	48	7.40
K15Y2-GS	Silver Grey												

Remote Control Ceiling Fans (AC Motor)

Baby Fan Series

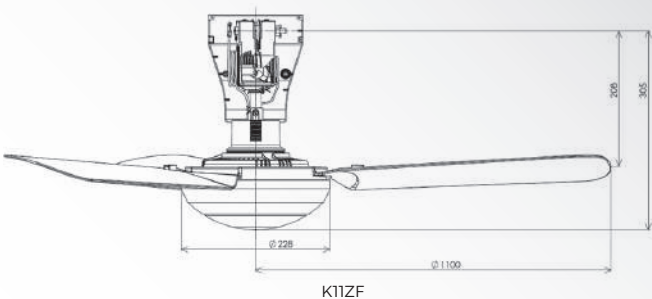


- Hook structure installation
- Remote control with 3 preset speed, 1, 3, 6 hours OFF timer and sleep mode
- PPG material blades for better durability and anti rust

Specifications

Model	Color	No. of Blade	Dimension	Energy Star Rating	RPM		CFM	Motor W		Motor HP	Motor Type	Noise Level (dB)	Nett Weight (kg)
					Low	High		Low	High				
K11ZF-WT	White	3	44"/110cm	4	133	239	6003	20	58	0.077	AC	49.5	5.20
K11ZF-GY	Grey												

Remote Control Ceiling Fans (DC Motor)

涼 Ryou Jr.

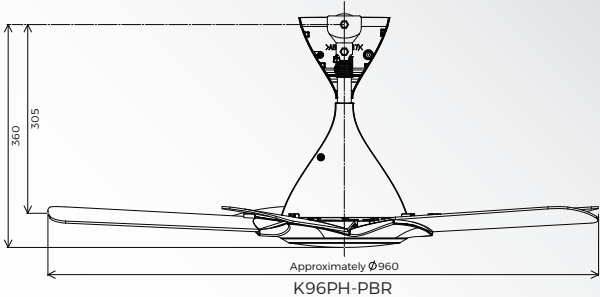

K96PH-PBR



DC (Direct Current) motor for energy saving



Radio Frequency (RF) Remote control with 5 preset speed, 3-6 hours sleep mode and 1,3,6 hours OFF timer



Strong and smooth air breeze in silent operation



Suitable for small room



Durable ABS Glass Fibre blades




Optional extended fan rod (refer page 36)

Specifications

Model	Color	No. of Blade	Dimension	Energy Star Rating	RPM		CFM	Motor W		Motor HP	Motor Type	Noise Level (dB)	Nett Weight (kg)
					Low	High		Low	High				
K96PH-PBR	Brown	5	38"/96cm	5	120	350	5827	4	33	0.044	DC	55	3.8

Remote Control Ceiling Fans (DC Motor)

涼 Ryou Series

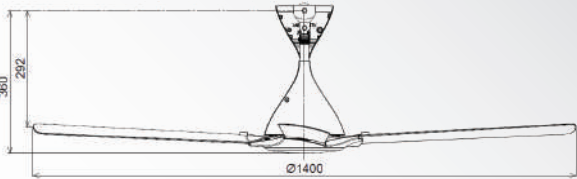

K14RH



K14RH-EY



K14RH-PBR



K14RH-WA



DC (Direct Current) motor for energy saving



Radio Frequency (RF) Remote control with 5 preset speed, 3-6 hours sleep mode and 1,3,6 hours OFF timer



Strong and smooth air breeze in silent operation



Innovative design with three colour options



Durable ABS Glass Fibre blades




Optional extended fan rod (refer page 36)

Specifications

Model	Color	No. of Blade	Dimension	Energy Star Rating	RPM		CFM	Motor W		Motor HP	Motor Type	Noise Level (dB)	Nett Weight (kg)
					Low	High		Low	High				
K14RH-EY	Elegant Grey	4	56"/140cm	5	100	210	7769	4	38	0.05	DC	54	3.7
K14RH-PBR	Brown												
K14RH-WA	Wood Acacia												

Remote Control Ceiling Fans (DC Motor)

涼 Ryou Series

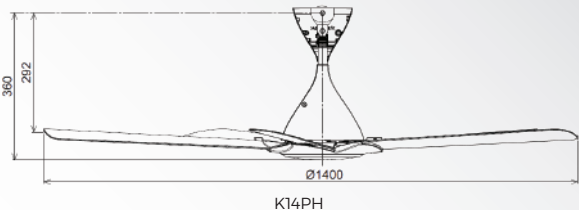

K14PH-EY



K14PH-PBR



K14PH-WA



DC (Direct Current) motor for energy saving



Radio Frequency (RF) Remote control with 5 preset speed, 3-6 hours sleep mode and 1,3,6 hours OFF timer



Strong and smooth air breeze in silent operation



Innovative design with three colour options



Durable ABS Glass Fibre blades




Optional extended fan rod (refer page 36)

Specifications

Model	Color	No. of Blade	Dimension	Energy Star Rating	RPM		CFM	Motor W		Motor HP	Motor Type	Noise Level (dB)	Nett Weight (kg)
					Low	High		Low	High				
K14PH-EY	Elegant Grey	5	56"/140cm	5	100	200	7769	4	38	0.05	DC	54	4.0
K14PH-PBR	Brown												
K14PH-WA	Wood Acacia												

Remote Control Ceiling Fans (DC Motor)

DC4™ Series

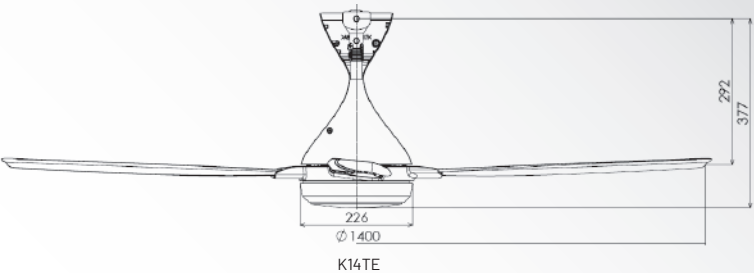

Remote control with 5 preset speed, 3-6 hours sleep mode and 1-6 hours OFF timer

Geared up with 1/f Yuragi feature (Natural Breeze)

Sleek design with two colours option

Durable metal blades

DC (Direct Current) motor for energy saving


Optional extended fan rod (refer page 36)

Specifications

Model	Color	No. of Blade	Dimension	Energy Star Rating	RPM		CFM	Motor W		Motor HP	Motor Type	Noise Level (dB)	Nett Weight (kg)
					Low	High		Low	High				
K14TE-DG	Dark Grey	4	56"/140cm	5	80	200	7769	4	29	0.04	DC	54	5.10
K14TE-WT	White												

Remote Control Ceiling Fans (DC Motor)

DC5™ Series

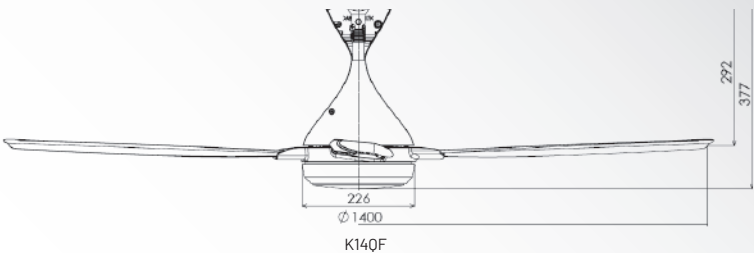

Remote control with 5 preset speed, 3-6 hours sleep mode and 1-6 hours OFF timer



Geared up with 1/f Yuragi feature (Natural Breeze)



Sleek design with two colours option



Durable metal blades



DC (Direct Current) motor for energy saving




Optional extended fan rod (refer page 36)

Specifications

Model	Color	No. of Blade	Dimension	Energy Star Rating	RPM		CFM	Motor W		Motor HP	Motor Type	Noise Level (dB)	Nett Weight (kg)
					Low	High		Low	High				
K14QF-DG	Dark Grey	5	56"/140cm	5	80	175	7769	4	29	0.04	DC	54	5.70
K14QF-WT	White												

Remote Control Ceiling Fans (DC Motor)

Sensa® Series

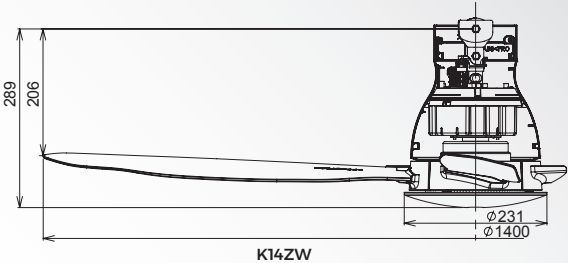

- 

Remote control with 9 preset speed, 2-8 hours sleep mode, 1-8 hours OFF and ON timer
- 

Geared up with 1/f Yuragi feature (Natural Breeze)
- 

Temperature sensor equipped
- 

Distinctive blade material (PPG) for better durability, rust and dent resistance
- 

DC (Direct Current) motor for energy saving
- 


Built-in LCD screen remote control

Specifications


Model	Color	No. of Blade	Dimension	Energy Star Rating	RPM		CFM	Motor W		Motor HP	Motor Type	Noise Level (dB)	Nett Weight (kg)
					Low	High		Low	High				
K14ZW	Elegant Grey	4	56"/140cm	5	81	239	7946	2.5	41	0.055	DC	51	4.90

Remote Control Ceiling Fans (DC Motor)

Sensa® Series

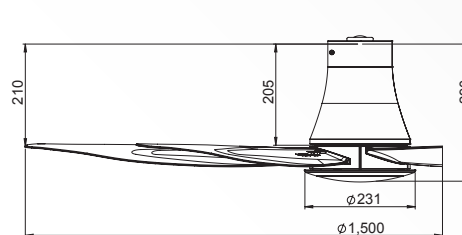

K15Z5-QEY

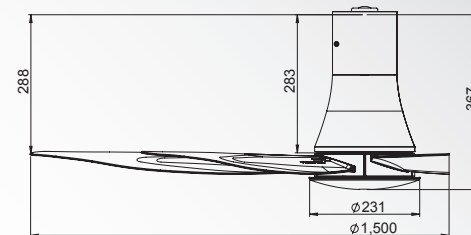

K15Z5-REY



K15Z5-REY (Sensa® 5)



K15Z5-QEY (Sensa® 5)



Remote control with
9 preset speed,
2-8 hours sleep mode,
1-8 hours OFF and
ON timer



Geared up with
1/f Yuragi feature
(Natural Breeze)



Temperature sensor
equipped



Distinctive blade
material (PPG)



DC (Direct Current)
motor for
energy saving



Built-in LCD screen
remote control




Modernistic design
with short pipe
or long pipe

Specifications

Model	Color	No. of Blade	Dimension	Energy Star Rating	RPM		CFM	Motor W		Motor HP	Motor Type	Noise Level (dB)	Nett Weight (kg)
					Low	High		Low	High				
K15Z5-QEY	Elegant Grey	5	60"/150cm	5	80	235	8652	3	41	0.055	DC	54	5.10
K15Z5-REY													5.30

Remote Control Ceiling Fans (DC Motor)

Nodoka® Series

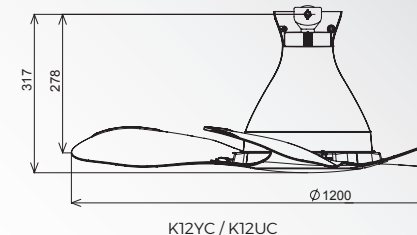

- Wi-Fi Smart control with 24 hours sleep mode, 24 hours ON/OFF timer and 1/f Yuragi (natural breeze) function
- Schedule function is set to perform preferred fan speed, ON/OFF timer and other features based on individual preference
- Reverse function drives the cool air upward and circulate the airflow evenly in comfortable temperature
- New Generation DC (direct current) motor for better air delivery and performance
- Stepless control of LED brightness and color (Applicable to K12UC only)
- Compatible Device: Android 6.0 or above and iOS 12.0 or above
- Distinctive blade material (ABS Glass Fibre) comfortable temperature
- Intelligent Motor Drive System (IMDS) for motor faulty detection
- Remote control with 10 preset speed
- Scene setting can be preset 4 light settings for daily activities (Applicable to K12UC only)

Specifications

Model	Color	No. of Blade	Dimension	Energy Star Rating	RPM (Forward)		RPM (Reverse)		CFM	Motor W				Motor HP	Motor Type	Noise Level (dB)	Nett Weight (kg)
										Fan Only		Fan & Light					
					Low	High	Low	High		Low	High	Low	High				
K12YC	Matte Grey	3	48"/120cm	5	55	170	55	170	7063	3	31	-	-	0.042	DC	41	4.90
K12UC										3	31	22	50			41	5.20

Model	K12UC									
LED Color	Mix (White + Warm)		White		Warm		Night Light (Warm)			
Range	MIN	MAX	MIN	MAX	MIN	MAX	Low	Medium	High	
Brightness Control	23(lx)	200(lx)	26(lx)	150(lx)	26(lx)	150(lx)	0.15(lx)	0.6(lx)	1.1(lx)	
Wattage (LED Only)	1.9W	19W	2.1W	15W	2.1W	15W	0.2W	0.3W	0.4W	


Remote Control Ceiling Fans (DC Motor)

Nodoka® Series



K15YC (Nodoka®)

K15UC (Nodoka®)

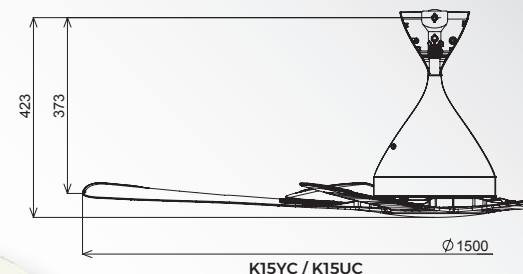


- Wi-Fi Smart control with 24 hours sleep mode, 24 hours ON/OFF timer and 1/f Yuragi (natural breeze) function
- Schedule function is set to perform preferred fan speed, ON/OFF timer and other features based on individual preference
- Reverse function drives the cool air upward and circulate the airflow evenly in comfortable temperature
- New Generation DC (direct current) motor for better air delivery and performance
- Stepless control of LED brightness and color (Applicable to K15UC only)
- Compatible Device: Android 6.0 or above and iOS 12.0 or above
- Distinctive blade material (ABS Glass Fibre)
- Intelligent Motor Drive System (IMDS) for motor faulty detection and blade faulty detection
- Remote control with 10 preset speed
- Scene setting can be preset 4 light settings for daily activities (Applicable to K15UC only)

Specifications


Model	Color	No. of Blade	Dimension	Energy Star Rating	RPM (Forward)		RPM (Reverse)		CFM	Motor W				Motor HP	Motor Type	Noise Level (dB)	Nett Weight (kg)
					Low	High	Low	High		Fan Only	Fan & Light	Low	High				
K15YC	Pearl White	5	60"/150cm	5	80	245	80	255	10594	4	54	-	-	0.073	DC	59	7.00
K15UC	Pearl White	5	60"/150cm	5	80	245	80	255	10594	4	54	23	73			59	7.30

Model	K15UC									
LED Color	Mix (White + Warm)		White		Warm		Night Light (Warm)			
Range	MIN	MAX	MIN	MAX	MIN	MAX	Low	Medium	High	
Brightness Control	23(lx)	200(lx)	26(lx)	150(lx)	26(lx)	150(lx)	0.15(lx)	0.6(lx)	1.1(lx)	
Wattage (LED Only)	1.9W	19W	2.1W	15W	2.1W	15W	0.2W	0.3W	0.4W	

Remote Control Ceiling Fans (DC Motor)

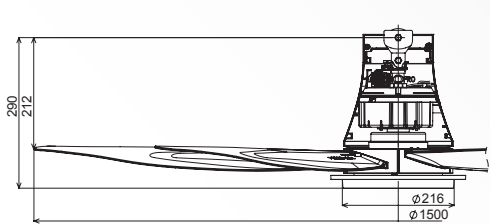

K15YX-QBR

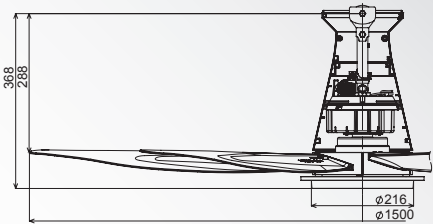

K15YX-RBR



K15YX-RBR



K15YX-QBR



Remote control with 9 preset speed, 2-8 hours sleep mode, 1-8 hours OFF and ON timer



Geared up with 1/f Yuragi feature (Natural Breeze)



DC (Direct Current) motor for energy saving



Distinctive blade material (PPG) for better durability, rust and dent resistance



Modernistic design with short pipe or long pipe




Built-in LCD screen remote control

Specifications

Model	Color	No. of Blade	Dimension	Energy Star Rating	RPM		CFM	Motor W		Motor HP	Motor Type	Noise Level (dB)	Nett Weight (kg)
					Low	High		Low	High				
K15YX-QBR	Brown	5	60" /150cm	5	80	235	8652	3	41	0.055	DC	54	5.10
K15YX-RBR													5.30

Remote Control Ceiling Fans (DC Motor)

Moshon® Series

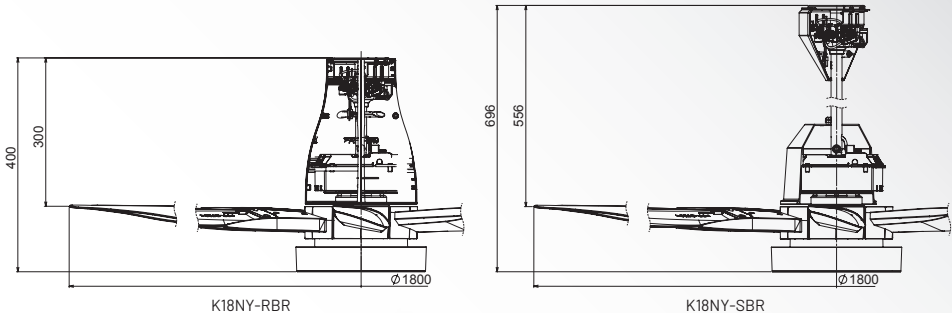

Remote control with 9 preset speed, 2-8 hours sleep mode, 1-8 hours OFF and ON timer



Twin DC (Direct Current) motor for energy saving



Optional extended fan rod (Applicable to K18NY-SBR only. Refer page 36)



Motion sensor equipped



Geared up with 1/f Yuragi feature (Natural Breeze)



Preset fan speed memory function



Distinctive blade material (PPG)



Modernistic design with short pipe or long pipe




Ball-joint installation (no hook required)

Specifications

Model	Color	No. of Blade	Dimension	RPM		CFM	Motor W		Motor HP	Motor Type	Noise Level (dB)	Nett Weight (kg)
				Low	High		Low	High				
K18NY-RBR	Dark Brown	6	70" / 180cm	80	185	11477	6	55	0.074	DC	54	11.70
K18NY-SBR												11.90

Wall Fans With Pull Cord

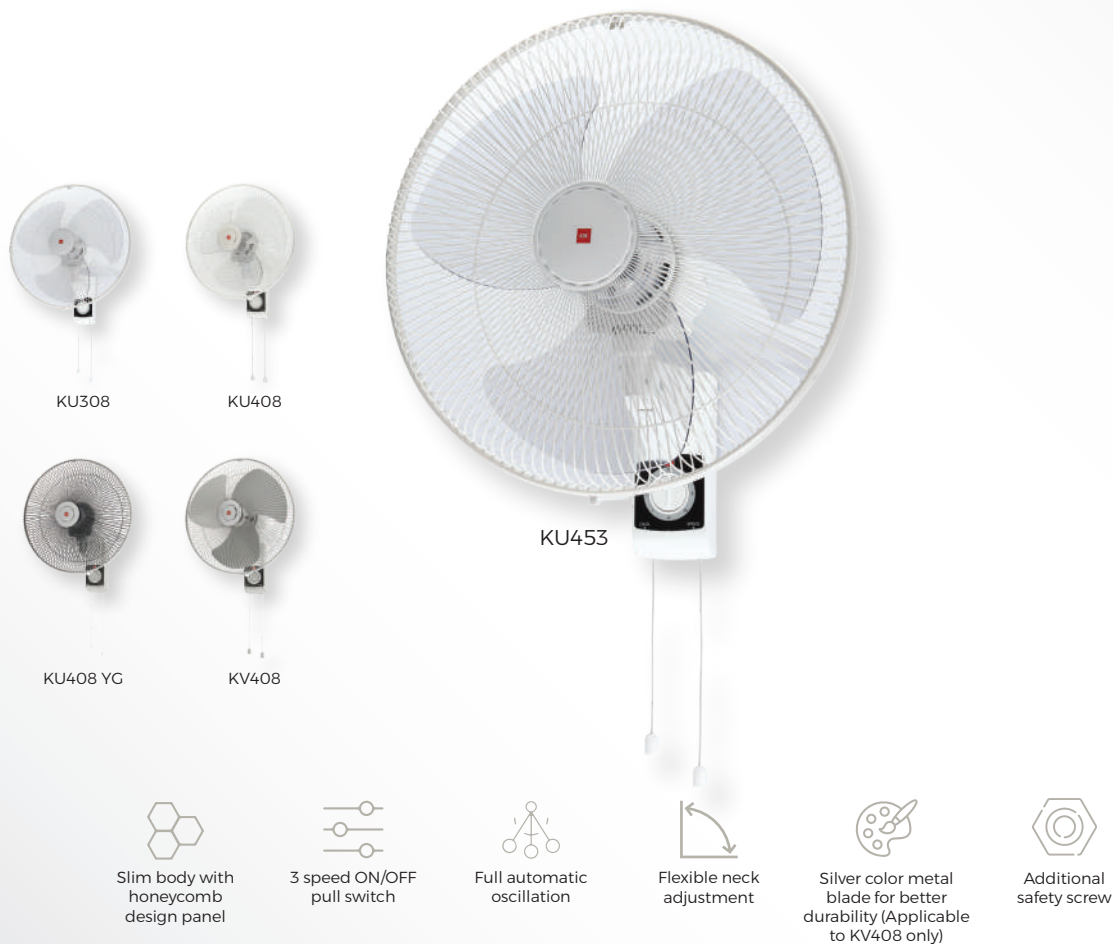

Specifications

Model	Color	Dimension	Energy Star Rating	RPM		CFM	Motor W		Motor HP	Motor Type	Noise Level (dB)	Nett Weight (kg)
				Low	High		Low	High				
KU308	White	12"/30cm	3	871-1065	1158-1416	1589	30.0-36.6	39.8-48.6	0.07	14 Pole Condenser	<50	3.30
KU408		16"/40cm	5	774-946	1103-1349	2225	38.9-47.5	49.9-60.9	0.08		4.45	
KU408 YG	Grey			839-1025	1135-1387	2225	38.3-46.8	48.2-59.0	0.09		4.55	
KV408				730-892	961-1175	3355	41.6-50.8	54.2-66.3			5.00	
KU453	White	18"/45cm										

Remote Control Wall Fan



KC-4GR



Condenser motor
with ball bearing



Full function remote control
with ON/OFF timer,
3 speed control, timer setting
and oscillation control



Manual ON/OFF
and oscillation
control available

Specifications

Model	Color	Dimension	Energy Star Rating	RPM		CFM	Motor W		Motor HP	Motor Type	Noise Level (dB)	Nett Weight (kg)
				Low	High		Low	High				
KC-4GR	Black	16"/40cm	5	774-946	1103-1349	2225	43.0-52.7	53.4-65.2	0.09	14 Pole Condenser	<60	4.60

Commercial Wall Fans



KU50H-WT



KU50H-DG


3 speed ON/OFF
pull switch


Full automatic
oscillation


Aluminium blade
for stronger
airflow and durability


Turbo Fin Guard
design generates
strong and focus
airflow up to
10 meter distance


Front Guard Locking
System
for safety purpose


Added angle adjust
bolt for extra stability
on the fan's
knee joint

Specifications

Model	Color	Dimension	RPM		CFM	Motor W		Motor HP	Motor Type	Noise Level (dB)	Nett Weight (kg)
			Low	High		Low	High				
KU50H-WT	White	20"/50cm	1020	1280	4661	68	78	0.094	14 Pole Condenser	62	6.00
KU50H-DG	Dark Grey										

Auto Fans



KQ409



360°
oscillation



Easy adjustment
angle
15°, 30° and 50°



Condenser motor
with ball bearing



5 speed
electronic regulator


Specifications

Model	Color	Dimension	Energy Star Rating	RPM		CFM	Motor W		Motor HP	Motor Type	Noise Level (dB)	Nett Weight (kg)
				Low	High		Low	High				
KQ409	White	16"/40cm	5	568-694	1089-1331	3002	18.3-22.4	46.8-57.2	0.08	14 Pole Condenser	<60	3.90

Glass Mounted Ventilating Fans



15WUD / 20WUD

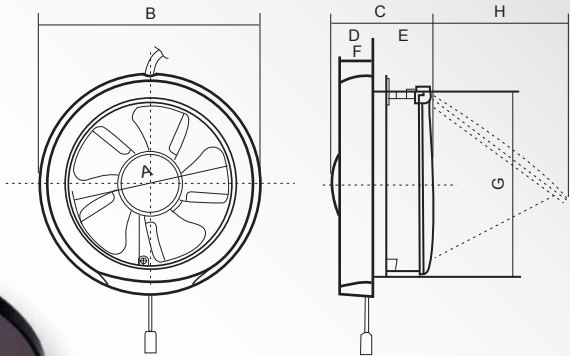

Improved high performance condenser motor with long life bearing



Advanced blade design for high air volume and low noise level



Low power consumption



Strengthen Shutter Structure for better durability



Installed directly into the glass window (window panel thickness from 3mm-7mm)



Cord operated shutter


Specifications

Model	Dimension	RPM	CFM	Motor Rating	Motor W	Motor Type	Noise Level (dB)	Nett Weight (kg)
15WUD	6"/15cm	1463	124	220-240V, 50Hz	8	Condenser	35	0.90
20WUD	8"/20cm	1042	212		16		32	1.10

Dimension (mm)

Model	A	B	C	D	E	F	G	H
15WUD	ø 150	ø 210	97	43	54	37.4	177	149
20WUD	ø 200	ø 271	98	36	62	36	237	201

Wall Mounted Ventilating Fans

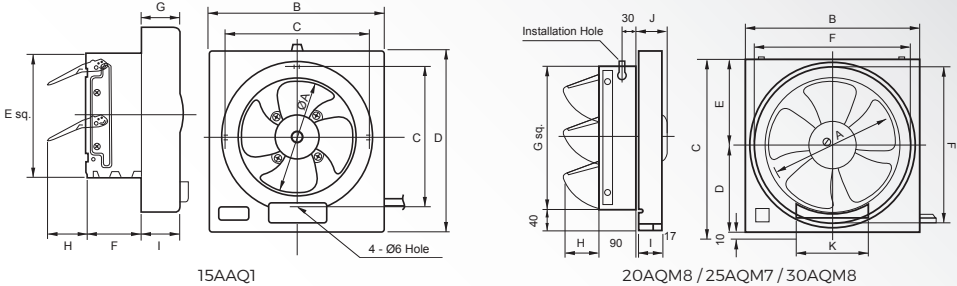

15AAQ1



20AQM8 / 25AQM7 / 30AQM8



High efficiency for
air flow
and energy saving



Ball bearing motor
for smooth
rotation and
excellent durability



Excellent for
small room
(Applicable
to 15AAQ1)



Quiet operation



Automatic shutter

Specifications

Model	Dimension	RPM	CFM	Motor Rating	Motor W	Motor HP	Motor Type	Noise Level (dB)	Nett Weight (kg)
15AAQ1	6"/15cm	1480	170	220-240V, 50Hz	15	-	Condenser	31	1.40
20AQM8	8"/20cm	1109-1301	318		14.9-18.3	0.02	4 Pole Condenser	37	2.30
25AQM7	10"/25cm	999-1221	530		25.2-30.8	0.03		39	2.60
30AQM8	12"/30cm	925-1085	727		31.8-38.8	0.05		45	3.00


Dimension (mm)

Model	A	B	C	D	E	F	G	H	I	J	K
15AAQ1	150 dia.	240	195	254	170	75	55	54	52	-	-
20AQM8	200 dia.	300	310	160	150	260	240	83	45	68	140
25AQM7	250 dia.	350	360	185	175	310	290	65	40	48	150
30AQM8	300 dia.	400	410	210	200	360	340	81			160

Wall Mounted Ventilating Fans



20ALA / 25ALA

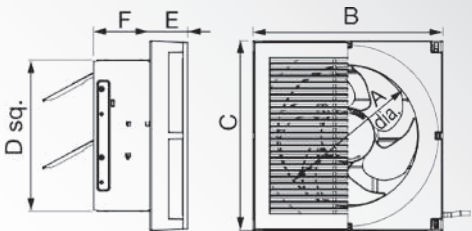

20ALA / 25ALA



Advance aerodynamic blade design minimizes any obstacle against the airflow



Improved high performance condenser motor with long life bearing



Automatic shutter



Curve shape front louver design for better outlook and safety



Energy saving


Specifications

Model	Dimension	RPM	CFM	Motor Rating	Motor W	Motor Type	Noise Level (dB)	Nett Weight (kg)
20ALA	8"/20cm	1280	323	220-240V, 50Hz	18	Condenser	38	2.00
25ALA	10"/25cm	1210	494		25		40.5	2.50

Dimension (mm)

Model	A	B	C	D	E	F
20ALA	223	302	302	240	60	90
25ALA	273	352	352	290	62	90


Wall Mounted Ventilating Fans

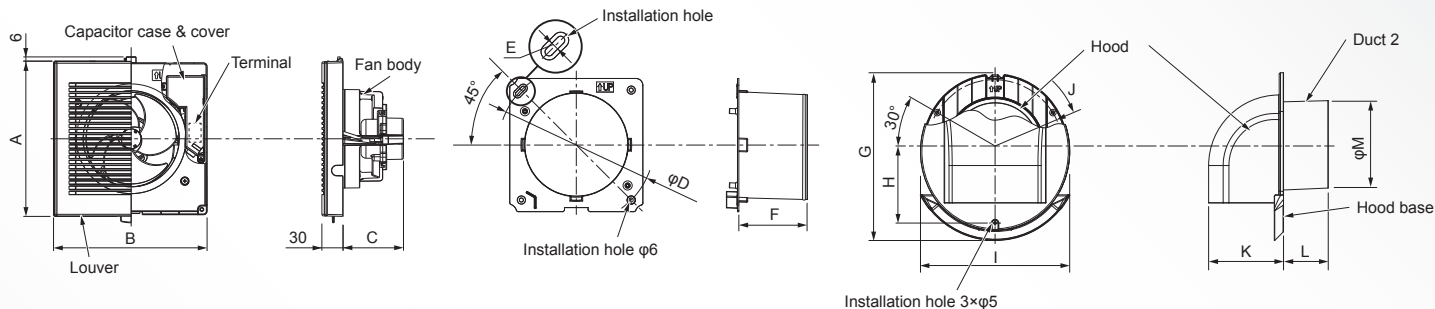

10EGKB
15EGKB



Accessories Included

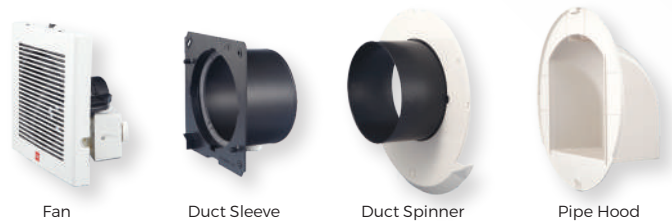

- Easy cleaning
- Energy saving
- Exhaust moisture and odour, preventing mould
- Excellent for bathroom use
- Easy installation
- Equipped with full accessories


Specifications

Model	Dimension	RPM	CFM	Motor Rating	Motor W	Noise Level (dB)	Nett Weight (kg)
10EGKB	4"/10cm	2690	45	220-240V, 50Hz	5.0	33	1.00
15EGKB	6"/15cm	2390	97		6.5	37	1.30

Dimension (mm)

Model	A	B	C	D	E	F	G	H	I	J	K	L	M	Wall Installation	
														Hole Size (mm)	Wall Thickness (mm)
10EGKB	170	170	83	177	6	100	250	107	220	99	99	82	118	ϕ 130 ~ 140	100-150
15EGKB	220	220	86	231	6	100	310	142	270	123	138	82	161	ϕ 175 ~ 185	100-150

Ceiling Mounted Ventilating Fans

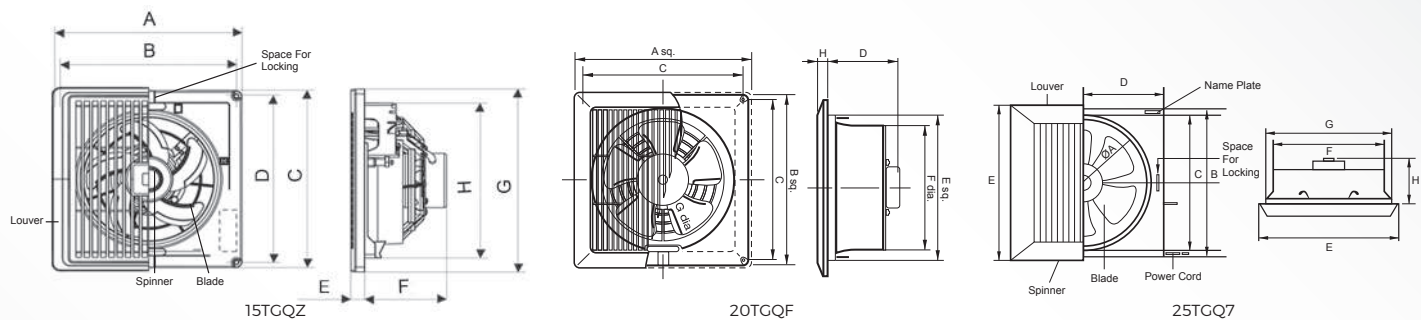

20TGQF



15TGQZ



25TGQ7



Q-Blade design for perfect balance and quiet operation



High efficiency for air flow and energy saving



Ball bearing motor for smoother and durable operation



Suitable for commercial and residential use

Specifications

Model	Dimension	RPM	CFM	Motor Rating	Motor W	Motor HP	Motor Type	Noise Level (dB)	Nett Weight (kg)
15TGQZ	6"/15cm	1330	141	220-240V, 50Hz	12	-	Condenser	35	1.20
20TGQF	8"/20cm	1250	312		20	-	Condenser	41	1.30
25TGQ7	10"/25cm	959-1172	367		24.8-30.3	0.03	4 Pole Condenser	45	1.90





Dimensions (mm)

Model	A	B	C	D	E	F	G	H
15TGQZ	244	230	244	230	18	108	253	214
20TGQF	315	305	286	130	260	232	223	13
25TGQ7	250	355	336	177.5	365	272	310	117.5

Ceiling Mounted Sirocco Ventilating Fans



17CUH / 24CUH / 24CDH

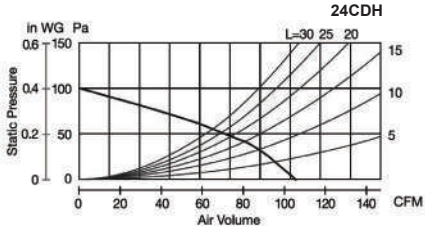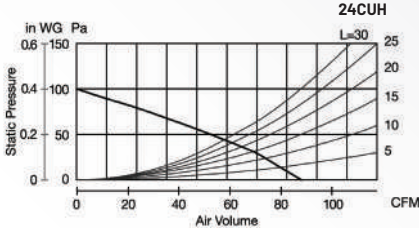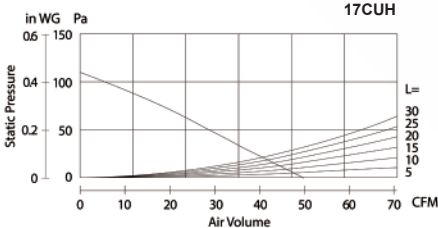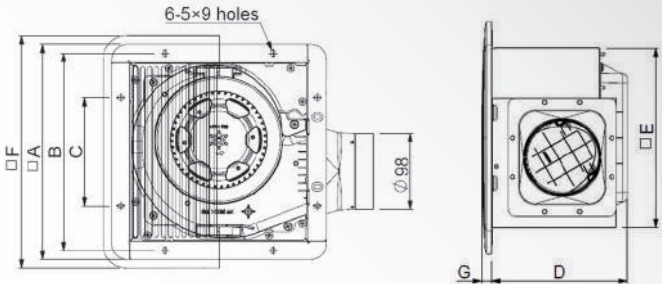

L : The length of duct (m) (The diameter of duct : Ø100mm)


Low noise with the distinctive design of Resonance-Noise-Absorption structure


Taper blade design to achieve strong and smooth ventilating performance


Optional duct cover (Refer page 36)


Better durability with well lubricated ball bearing type motor


Reverse flow prevention shutter (shutter deflection if slight, resulting in further improvement of air tightness)


Specifications

Model	RPM	CFM	Motor Rating	Motor W	Noise Level (dB)	Nett Weight (kg)
17CUH	680	53	220-240V, 50Hz	9.5	26	1.70
24CUH	530	94		12.0	27	2.70
24CDH	790	106		15	30	2.70

Dimensions (mm)

Model	A	B	C	D	E	F	G	Applicable Pipe	Installation Space (mm)
17CUH	214	194	84	164	170	230	13	Ø 100	177 x 177
24CUH	278	255	140	175	233	300	13	Ø 100	240 x 240
24CDH	278	255	140	175	230	300	13	Ø 100	240 x 240

Remote Control Ceiling Fans With Led (DC Motor)

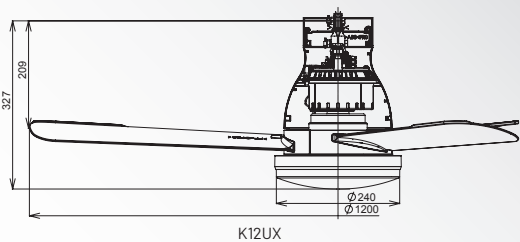

Remote control with 9 preset speed, 2-8 hours sleep mode, 1-8 hours OFF and ON timer



Geared up with 1/f Yuragi feature (Natural Breeze)



LED Lighting comes with 3 level of brightness control dedicated for different needs and preference



Distinctive blade material (PPG) for better durability, rust and dent resistance



DC (Direct Current) motor for energy saving



Built-in LCD screen remote control



Suitable for small and low ceiling room

Specifications

Model	Color	No. of Blade	Dimension	Energy Star Rating	RPM		CFM	Motor W				Motor HP	Motor Type	Noise Level (dB)	Nett Weight (kg)	Model	K12UX		
					Low	High		Fan Only		Fan & Light							High	Low	Medium
								Brightness Control	150(lx)	75(lx)	3(lx)								
K12UX	Elegant Grey	3	48"/120cm	5	80	236	6603	3.0	28.0	21.0	46.0	0.038	DC	50	4.90	LED Colour	Cool Daylight		
																Wattage	18W	9W	1W


Remote Control Ceiling Fans With Led (DC Motor)




K15UW



K15UW-QEY

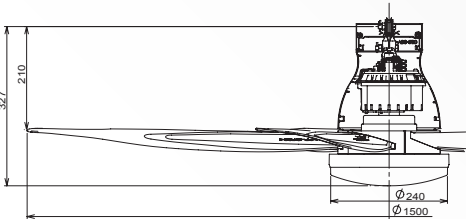

K15UW-QEY

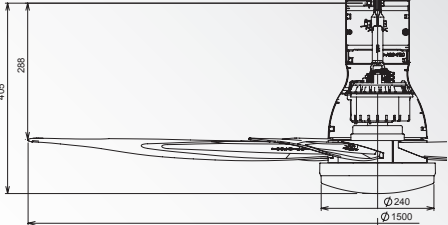

K15UW



RECOMMENDED HOOK



Remote control with 9 preset speed, 2-8 hours sleep mode, 1-8 hours OFF and ON timer



Geared up with 1/f Yuragi feature (Natural Breeze)



LED Lighting comes with 3 level of brightness control dedicated for different needs and preference



Distinctive blade material (PPG)



DC (Direct Current) motor for energy saving



Built-in LCD screen remote control




Modernistic design with short pipe or long pipe





Specifications

Model	Color	No. of Blade	Dimension	Energy Star Rating	RPM		CFM	Motor W				Motor HP	Motor Type	Noise Level (dB)	Nett Weight (kg)	Model	K15UW-QEY / K15UW		
					Low	High		Fan Only		Fan & Light						Brightness Control	High	Medium	Low
								Low	High	Low	High						White	Cool Daylight	Warm
K15UW-QEY	Elegant Grey	5	60"/150cm	5	80	235	8652	3.0	41.0	25.0	63.0	0.055	DC	53	6.00	LED Colour	200(lx)	150(lx)	3(lx)
K15UW															6.20		Wattage	22W	18W

Ceiling Mounted Sirocco Ventilating Fans

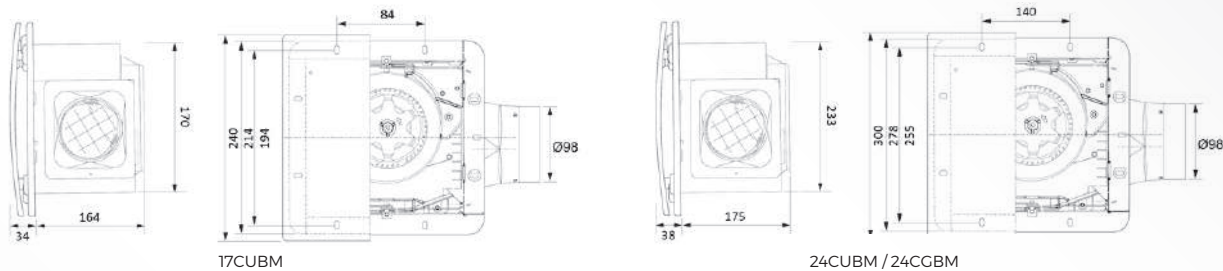

17CUBM / 24CUBM / 24CGBM




Specifications

Model	RPM	CFM	Motor Rating	Motor W	Motor Type	Noise Level (dB)	Nett Weight (kg)
17CUBM	800	53	220-240V, 50Hz	9.5	2 Pole Condenser	24	1.90
24CUBM	680	94		12	4 Pole Condenser	26	2.90
24CGBM	995	129		25.5	4 Pole Condenser	38	2.90





Dimension (mm)

Model	A	B	C	D	E	F	G	Installation Space	Applicable Pipe
17CUBM	170	164	34	84	194	214	240	177 x 177	Ø 100
24CUBM	233	175	38	140	255	278	300	240 x 240	Ø 100
24CGBM	233	175	38	140	255	278	300	240 x 240	Ø 100

Ceiling Mounted Sirocco Ventilating Fans

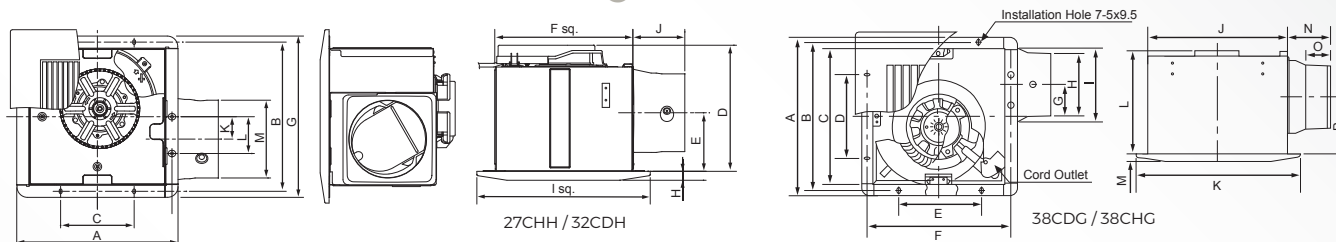

27CHH / 32CDH / 38CDG / 38CHG



L : The length of duct (m) (The diameter of duct : Ø150mm)


Low noise with the distinctive design of Resonance-Noise-Absorption structure


Taper blade design to achieve strong and smooth ventilating performance


2 speed motor for better convenience


Optional duct cover (Refer page 36)


Better durability with well lubricated ball bearing type motor


Reverse flow prevention shutter (shutter deflection if slight, resulting in further improvement of air tightness)


Specifications

Model		RPM	CFM	Motor Rating	Motor W	Motor Type	Noise Level (dB)	Nett Weight (kg)
27CHH	High	570	194	220-240V, 50Hz	28	4 Pole Condenser	34	4.40
	Low	480	153		23		30	
32CDH	High	590	253		42		36	5.20
	Low	460	177		32		28	
38CDG	High	645	377		90		44	9.70
	Low	456	253		66		35	
38CHG	High	790	471		122		50	10.40
	Low	540	309		89		40	



Dimensions (mm)

Model	A	B	C	D	E	F	G	H	I	J	K	L	M	N	O	P	Installation Space	Applicable Pipe
27CHH	307	284	140	240	112	260	307	19	330	100	43	70	148	100	-	112	270 x270	Ø 150
32CDH	357	334	190	240	112	310	357	19	380	100	68	70	148	100	-	112	320 x 320	Ø 150
38CDG	422	399	375	255	255	374	72.3	142	158	376	450	250	22	108	55	127	385 x385	Ø 150

High Pressure Industrial Ventilating Fans

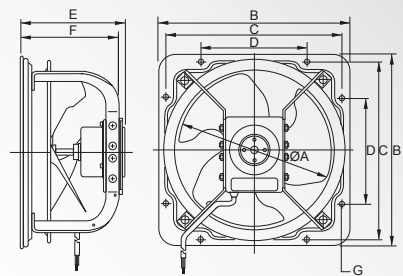

25GSC / 30GSC



The high-performance totally enclosed condenser motor contains a thermal protector which prevents the temperature of the motor from rising abnormally



A unique drain mechanism discourages the ingress of water and dust into the motor, resulting in excellent durability



Single Phase (Reversible)



Slimline design for optimum space utilization, permitting installation in equipment



Can be used over an ambient temperature range of -10°C to +50°C



Possible to install horizontally

Specifications

Model	Dimension	RPM	CFM	Motor Rating	Motor W	Motor Type	Noise Level (dB)	Nett Weight (kg)
25GSC	10"/25cm	1360	676	240V, 50Hz	39	4 Pole Induction	34	4.40
30GSC	12"/30cm	1360	1071		59		38	6.10

Dimensions (mm)

Model	A	B	C	D	E	F	G
25GSC	250 dia.	327	298	165	171	164	10 dia.
30GSC	300 dia.	378	349	210	200	187	




High Pressure Industrial Ventilating Fans



35GSC



40GSC

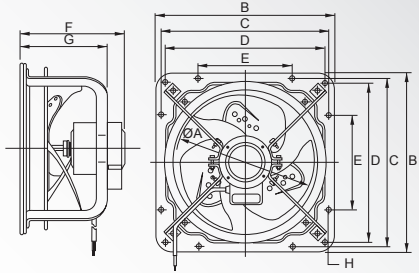

The high-performance totally enclosed condenser motor contains a thermal protector which prevents the temperature of the motor from rising abnormally



A unique drain mechanism discourages the ingress of water and dust into the motor, resulting in excellent durability



Single Phase (Reversible)



Slimline design for optimum space utilization, permitting installation in equipment



Can be used over an ambient temperature range of -10°C to +50°C



Possible to install horizontally


Specifications

Model	Dimension	RPM	CFM	Motor Rating	Motor W	Motor Type	Noise Level (dB)	Nett Weight (kg)
35GSC	14"/35cm	1420	1507	240V, 50Hz	88	4 Pole Induction	44	10.50
40GSC	16"/40cm	1450	2125		151	4 Pole Induction	47	19.00


Dimensions (mm)

Model	A	B	C	D	E	F	G	H
35GSC	350 dia.	467	434	-	250	236	219	12 dia.
40GSC	400 dia.	518	485	460	280	274	225	12 dia.

Industrial Ventilating Fan

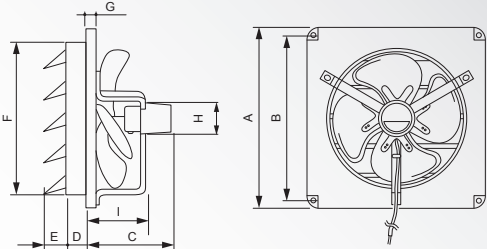

40KAQA



To ventilate factories, warehouse, restaurant kitchen and other locations where powerful ventilation is necessary



Wave-shaped metal blade delivers abundant air volume



Powerful, efficient and durable condenser motor



Operate at an ambient temperature range of -10°C to +50°C



Durable powder coating for rust resistance



Equipped with automatic shutter

Specifications

Model	Dimension	RPM	CFM	Motor Rating	Motor W	Motor Type	Noise Level (dB)	Nett Weight (kg)
40KAQA	16"/40cm	1410	1155	220-240V, 50Hz	66	4 Pole Condenser	51	6.40

Dimension (mm)


Model	A	B	C	D	E	F	G	H	I
40KAQA	510	480	215	40	55	434	10	126	130

Accessories

Duct Cover For Ventilating Fan



MGX100K / MGX150K

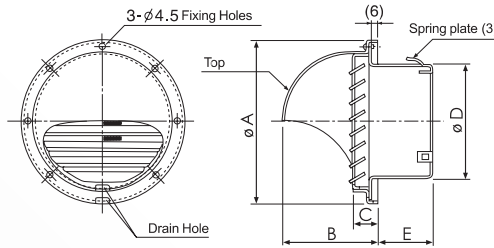

High Strength
- SUS 304
stainless steel



Excellent anti-rust
capability - hood part
coated with
metallic silver paint



Easy Installation -
spring clips facilitate
duct / pipe connection



Keep out ingress of
small particles and
insects from outside

Specifications

Model	A	B	C	D	E	Dimension of Net (mm)	Dimension of Applicable Pipe(mm)
MCX100K	141	79	20	97	48	2.5 x 2.5	100
MGX150K	190	106	23	147	53	2.5 x 2.5	150

* Applicable models

100mm = 17CUH, 24CUH, 24CDH, 17CUBM, 24CUBM, 24CGBM
150mm = 27CHH, 32CDH, 38CDG, 38CHG

Extended Fan Rod for Ceiling Fan



Fan Rod



Equipped with
full length safety wire
with switch lever
for safety switch



Available upon ordering
(1-2 months lead time)



Available in
various length

Specifications

Applicable to K12V0, K15V0, K15VC, K15W0-S

Part Number	Description
M15A00292ZMW	Pipe Assy (30cm / 12")
SPCF2001-M	Pipe Assy (40cm / 16")
SPCF2002-M	Pipe Assy (45cm / 18")
SPCF2003-M	Pipe Assy (60cm / 24")
SPCF2004-M	Pipe Assy (75cm / 30")
SPCF2005-M	Pipe Assy (90cm / 36")
SPCF2007-M	Pipe Assy (120cm / 48")
SPCF2008-M	Pipe Assy (135cm / 54")
SPCF2009-M	Pipe Assy (150cm / 60")

Applicable to K18NY-SBR Only

Part Number	Description
KZ30PB	Pipe Assy (75cm / 30")
KZ36PB	Pipe Assy (90cm / 36")
KZ48PB	Pipe Assy (120cm / 48")
KZ60PB	Pipe Assy (150cm / 60")
KZ79PB	Pipe Assy (197.5cm / 79")

Applicable to K14TE, K14QF, K14RH-WA, K14PH-WA only

Part Number	Description
KZ30PEMK	Pipe Assy - Dark Grey (75cm/ 30")
KZ30PEMW	Pipe Assy - White (75cm/ 30")
KZ60PEMK	Pipe Assy - Dark Grey (150cm/ 60")
KZ60PEMW	Pipe Assy - White (150cm/ 60")

Applicable to K14RH-EY, K14RH-PBR, K14PH-EY, K14PH-PBR, K96PH-PBR only

Part Number	Description
KZ30PEMH	Pipe Assy - Grey (75cm/ 30")
KZ30PEMT	Pipe Assy - Brown (75cm/ 30")
KZ60PEMH	Pipe Assy - Grey (150cm/ 60")
KZ60PEMT	Pipe Assy - Brown (150cm/ 60")

Applicable to K14XF Only

Part Number	Description
KZ24PFMH	Pipe Assy - Grey (60cm / 24")
KZ24PFMK	Pipe Assy - Black (60cm / 24")
KZ36PFMH	Pipe Assy - Grey (90cm / 36")
KZ36PFMK	Pipe Assy - Black (90cm / 36")
KZ48PFMH	Pipe Assy - Grey (120cm / 48")
KZ48PFMK	Pipe Assy - Black (120cm / 48")
KZ60PFMH	Pipe Assy - Grey (150cm / 60")
KZ60PFMK	Pipe Assy - Black (150cm / 60")



Fans For Life!



SINCE 1909
JAPAN

KDK FANS (M) SDN BHD (Company No: 200201001186/568849-X)

Suite 2.01, Level 2, Wisma Ali Bawal 1, 11, Jln Tandang, 46050 Petaling Jaya, Selangor.

Tel : 03-7785 5011

Fax : 03-7785 2655

Website: www.kdk.com.my

Printed in Malaysia

CATALOG NO : ME-25-B

10/25

Specifications are subject to change without prior notice
** Product may vary from pictures shown