

Ceiling Fans Alternating Current (AC) Motor

K12WO 120cm/48"
K15WO 150cm/60"
K15WO-SL 150cm/60"

- 5 speed
- Wider sweeping blade
- Ideal for small rooms and space (Applicable to K12WO only)
- Durable metal blade



K15WO-SL Silver K12WO / K15WO Copper Brown

K12VO 120cm/48"
K15VO 150cm/60"
K15VC 150cm/60"

- 5 speed
- Wider sweeping blade
- Shorter blades for small rooms (K12VO)
- Durable metal blade
- Preassembled fan rod (K15VC)
- Comply with government approved project standard (K15VC)



White

K12VO-PBR 120cm/48"
K15VO-PBR 150cm/60"

- 5 speed
- Wider sweeping blade
- Durable metal blade



Brown

K15WO-S 150cm/60"

- 5 speed
- Wider sweeping blade
- Double hybrid coating treatment
- Suitable for coastal areas
- Durable metal blade
- Comply with government approved standard



White

K11ZF-GY 110cm/44"
K11ZF-WT 110cm/44"

- Remote control with 3 preset speed
- 1-6 hours OFF timer
- 3-6 hours sleep mode
- Hook type installation
- Suitable for low ceiling and small space
- PPG blade



K11ZF-GY Grey K11ZF-WT White

K14Y2 140cm/56"
V-Touch@Jr.

- Remote control with 5 preset speed
- 1-6 hours OFF timer
- 3-6 hours sleep mode
- 1/f Yuragi (Natural Breeze)
- 3D Aero Curve blade design
- PPG blade



Silver Grey

K15Y2-CO 150cm/60"
K15Y2-GS 150cm/60"
V-Touch@

- Remote control with 5 preset speed
- 1-6 hours OFF timer
- 3-6 hours sleep mode
- 1/f Yuragi (Natural Breeze)
- 3D Aero Curve blade design
- PPG blade



K15Y2-CO Copper Bronze K15Y2-GS Silver Grey

K14XF-GY 140cm/56"
K14XF-BK 140cm/56"

- Remote control with 3 preset speed
- 1-6 hours OFF timer
- 3-6 hours sleep mode
- Durable metal blade



K14XF-GY Grey K14XF-BK Black

K14KF-GY 140cm/56"
K14KF-BK 140cm/56"

- Remote control with 3 preset speed
- 1-6 hours OFF timer
- 3-6 hours sleep mode
- Canopy short pipe design for low ceiling
- Durable metal blade



K14KF-BK Black K14KF-GY Grey

Ceiling Fans Direct Current (DC) Motor

K96PH-PBR 96cm/38"
涼 Ryou Jr.

- Radio Frequency (RF) Remote control with 5 preset speed
- 1-6 hours OFF timer
- 3-6 hours sleep mode
- DC Motor Technology
- ABS Glass Fibre blade
- Suitable for small room



Brown

K14RH-WA 140cm/56"
涼 Ryou series

- Radio Frequency (RF) Remote control with 5 preset speed
- 1-6 hours OFF timer
- 3-6 hours sleep mode
- DC Motor Technology
- ABS Glass Fibre blade



Wood Acacia

K14PH-WA 140cm/56"
涼 Ryou series

- Radio Frequency (RF) Remote control with 5 preset speed
- 1-6 hours OFF timer
- 3-6 hours sleep mode
- DC Motor Technology
- ABS Glass Fibre blade



Wood Acacia

Ceiling Fans Direct Current (DC) Motor

K14RH-EY 140cm/56"
涼 Ryou series

- Radio Frequency (RF) Remote control with 5 preset speed
- 1-6 hours OFF timer
- 3-6 hours sleep mode
- DC Motor Technology
- ABS Glass Fibre blade



Elegant Grey

K14RH-PBR 140cm/56"
涼 Ryou series

- Radio Frequency (RF) Remote control with 5 preset speed
- 1-6 hours OFF timer
- 3-6 hours sleep mode
- DC Motor Technology
- ABS Glass Fibre blade



Brown

K14PH-EY 140cm/56"
涼 Ryou series

- Radio Frequency (RF) Remote control with 5 preset speed
- 1-6 hours OFF timer
- 3-6 hours sleep mode
- DC Motor Technology
- ABS Glass Fibre blade



Elegant Grey

K14PH-PBR 140cm/56"
涼 Ryou series


- Radio Frequency (RF) Remote control with 5 preset speed
- 1-6 hours OFF timer
- 3-6 hours sleep mode
- DC Motor Technology
- ABS Glass Fibre blade



Brown

K12UX 120cm/48"

- Remote control with 9 preset speed
- 1-8 hours OFF and ON timer
- 2-8 hours sleep mode
- 1/f Yuragi (Natural Breeze)
- LED lighting - 3 levels of brightness control
- DC Motor Technology
- Suitable for small and low ceiling room
- PPG blade



Elegant Grey

RECOMMENDED HOOK

K15UW 150cm/60"
K15UW-QEY 150cm/60"

- Remote control with 9 preset speed
- 1-8 hours OFF and ON timer
- 2-8 hours sleep mode
- 1/f Yuragi (Natural Breeze)
- LED lighting - 3 levels of brightness control
- DC Motor Technology
- Short pipe (245mm) - K15UW-QEY
- Long pipe (323mm) - K15UW
- PPG blade



Elegant Grey

RECOMMENDED HOOK

K14TE-DG 140cm/56"
K14TE-WT 140cm/56"
DC4™ series

- Remote control with 5 preset speed
- 1-6 hours OFF timer
- 3-6 hours sleep mode
- Schedule function and Reverse function
- DC Motor Technology
- Durable metal blade



K14TE-DG Dark Grey K14TE-WT White

K14QF-WT 140cm/56"
K14QF-DG 140cm/56"
DC5™ series


- Remote control with 5 preset speed
- 1-6 hours OFF timer
- 3-6 hours sleep mode
- 1/f Yuragi (Natural Breeze)
- DC Motor Technology
- Durable metal blade



K14QF-WT White K14QF-DG Dark Grey

K12YC 120cm/48"
Nodoka® Jr.

- Remote control with 10 preset speed
- WiFi Smart control with 24 hours sleep mode and ON/OFF timer
- 1/f Yuragi (Natural Breeze)
- Schedule function and Reverse function
- New Generation DC (direct current) motor
- ABS Glass Fibre blade




Matte Grey

WiFi CERTIFIED KDK Ceiling Fan

RECOMMENDED HOOK

K12UC 120cm/48"
Nodoka® Jr.

- Remote control with 10 preset speed
- WiFi Smart control with 24 hours sleep mode and ON/OFF timer
- 1/f Yuragi (Natural Breeze)
- Schedule function, Scene setting and Reverse function
- Stepless control for LED light brightness and color
- New Generation DC (direct current) motor
- ABS Glass Fibre blade




Matte Grey

WiFi CERTIFIED KDK Ceiling Fan

RECOMMENDED HOOK

K15YC 150cm/60"
Nodoka®

- Remote control with 10 preset speed
- WiFi Smart control with 24 hours sleep mode and ON/OFF timer
- 1/f Yuragi (Natural Breeze)
- Schedule function and Reverse function
- New Generation DC (direct current) motor
- ABS Glass Fibre blade



Pearl White

WiFi CERTIFIED KDK Ceiling Fan

RECOMMENDED HOOK

K15UC 150cm/60"
Nodoka®

- Remote control with 10 preset speed
- WiFi Smart control with 24 hours sleep mode and ON/OFF timer
- 1/f Yuragi (Natural Breeze)
- Schedule function, Scene setting and Reverse function
- Stepless control for LED light brightness and color
- New Generation DC (direct current) motor
- ABS Glass Fibre blade



Pearl White

WiFi CERTIFIED KDK Ceiling Fan

RECOMMENDED HOOK

K14ZW 140cm/56"
Sensa® 4

- Remote control with 9 preset speed
- 1-8 hours OFF and ON timer
- 2-8 hours sleep mode
- 1/f Yuragi (Natural Breeze)
- Temperature sensor
- DC Motor Technology
- PPG blade



Elegant Grey

RECOMMENDED HOOK

K15Z5-QEY 150cm/60"
K15Z5-REY 150cm/60"
Sensa® 5

- Remote control with 9 preset speed
- 1-8 hours OFF and ON timer
- 2-8 hours sleep mode
- 1/f Yuragi (Natural Breeze)
- Temperature sensor
- DC Motor Technology
- Short pipe (245mm) - K15Z5-QEY
- Long pipe (323mm) - K15Z5-REY
- PPG blade



Elegant Grey

RECOMMENDED HOOK

K15YX-QBR 150cm/60"
K15YX-RBR 150cm/60"

- Remote control with 9 preset speed
- 1-8 hours OFF and ON timer
- 2-8 hours sleep mode
- 1/f Yuragi (Natural Breeze)
- DC Motor Technology
- Short pipe (245mm)
- PPG blade
- Short pipe (245mm) - K15YX-QBR
- Long pipe (323mm) - K15YX-RBR
- PPG blade



Brown

RECOMMENDED HOOK

K18NY-RBR 180cm/70"
K18NY-SBR 180cm/70"
Moshon®

- Remote control with 9 preset speed
- 2-8 hours sleep mode, 1-8 hours OFF and ON timer
- Ball-joint installation
- 1/f Yuragi (Natural breeze)
- Motion Sensor
- Twin DC motor technology
- Preset fan speed memory function
- Short pipe (300mm) - K18NY-RBR
- Long pipe (556mm) - K18NY-SBR
- PPG blade



Dark Brown

NO HOOK REQUIRED

Table Fans

KB-304 30cm/12"
KB-404 40cm/16"

- 3 speed on/off push button switch
- Full automatic oscillation
- Clutch control



Silver Blue Beige Flame Red

KX-405 40cm/16"

- 3 speed on/off push button switch
- Full automatic oscillation
- Clutch control
- Flexible neck adjustment



Deep Red Metal Grey

KQ409 40cm/16"

- 5 speed
- 360° oscillation
- Adjustment angles 15°, 30°, 50°



Remote Control Wall Fan

KC-4GR 40cm/16"

- Remote control with 3 preset speed
- 1-6 hours timer
- Manual on/off and oscillation control
- Soft touch control panel



Walls Fan

KU308 30cm/12"
KU408 40cm/16"
KU408 YG 40cm/16"
KU453 45cm/18"
KV408 40cm/16"

- 3-speed On/Off pull switch
- Oscillation Control by pull switch
- Flexible neck adjustment
- Silver color blade for better durability (Applicable to KV408 only)



KU408 YG & KV408 Grey KU308, KU408 & KU453 White

Commercial Wall Fan

KU50H-WT 50cm/20"
KU50H-DG 50cm/20"

- 3 speed ON/OFF pull switch
- Full automatic oscillation
- Aluminium blade for stronger airflow and durability
- Turbo Fin Guard design generates airflow up to 10 meter distance
- New Front Guard Locking System
- Added angle adjust bolt for extra stability



KU50H-WT White KU50H-DG Dark Grey

KU50J-DG 50cm/20"

- Equipped with 1.4 meter power cable to a wall switch box, with 3 speed and ON/OFF control
- Full automatic oscillation
- Aluminium blade for stronger airflow and durability
- Turbo Fin Guard design generates airflow up to 10 meter distance
- New Front Guard Locking System
- Added angle adjust bolt for extra stability



KU50J-DG Dark Grey

Glass Mounted Ventilating Fans

15WUD 15cm/6"
20WUD 20cm/8"

- Advanced blade design
- Ball bearing condenser motor
- Pull cord operated shutter
- Fit window panel thickness 3mm to 7mm
- Low noise
- Suitable for bathrooms



Ceiling Mounted Ventilating Fans

15TGQZ 15cm/6"
20TGQF 20cm/8"
25TGQ7 25cm/10"


- Q-blade design
- High efficiency airflow
- Durable and long lasting operation
- Low noise and energy saving



Ceiling Mounted Sirocco Ventilating Fans

17CUH
24CUH
17CUBM
24CUBM
24CGBM

- Low Noise with Resonance Absorption Structure
- Taper blade design for high performance
- HP (half pitch) motor with ball bearing for better durability
- Curve-shaped backdraft shutter

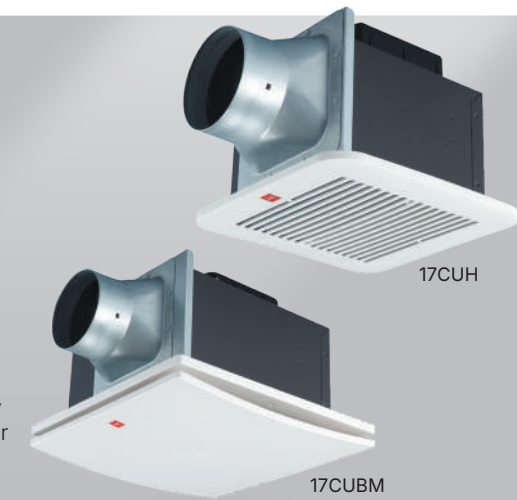

Wall Mounted Ventilating Fans

10EGKB 10cm/4"
15EGKB 15cm/6"

- Excellent for bathroom
- Easy installation
- Equipped with full accessories
- Easy Cleaning
- Energy saving
- Exhaust moisture and odour, preventing mould



Wall Mounted Ventilating Fans

15AAQ1 15cm/6"
20AQM8 20cm/8"
25AQM7 25cm/10"
30AQM8 30cm/12"

- Q-blade design
- High efficiency airflow
- Durable and long lasting operation
- Low noise and energy saving
- Automatic shutter



20ALA 20cm/8"
25ALA 25cm/10"

- Curve shape front louver design
- Aerodynamic blade design
- High efficiency airflow
- Ball bearing type motor for durability
- Low noise and energy saving
- Automatic shutter



40KAQA 40cm/16"

- Large metal blade assembly for abundant air volume
- Powerful, efficient and durable condenser motor
- Possible to install horizontally
- Automatic shutter
- Ideal for factories, warehouse, restaurant, workshop



Specifications

Model	RPM		Capacity (CFM)	Wattage		Noise Level (dB)	Operating Weight (kg)
	Low	High		Low	High		
K12WO	131-177	273-333	5721	15.1-20.5	47.7-58.3	<58	4.80
K15WO / SL	81-118	216-264	8122	14.7-19.9	67.5-82.5	<62	5.30
K15VO / PBR / K15VC	81-118	216-264	8122	14.7-19.9	67.5-82.5	<62	5.10
K12VO / PBR	131-177	273-333	5721	15.1-20.5	47.7-58.3	<58	4.60
K15WO-S	81-118	216-264	8122	14.7-19.9	67.5-82.5	<62	5.50
K11ZF-GY / WT	133	239	6003	20.0	58.0	49.5	5.20
K14Y2	102	215	7946	17.8	85.0	52.0	6.40
K15Y2-CO / GS	84	195	7946	20.5	85.0	48.0	7.40
K14XF-GY / BK	136	268	7416	20.0	65.0	56.0	5.20
K14KF-GY / BK	136	268	7416	20.0	65.0	56.0	5.20
K96PH-PBR	120	350	5827	4.0	33.0	55.0	3.80
K14RH-WA	100	210	7769	4.0	38.0	54.0	3.70
K14PH-WA	100	200	7769	4.0	38.0	54.0	4.00
K14RH-EY / PBR	100	210	7769	4.0	38.0	54.0	3.70
K14PH-EY / PBR	100	200	7769	4.0	38.0	54.0	4.00
K12UX	80	236	6603	3.0	46.0	50.0	4.90
K15UW / QEY	80	235	8652	3.0	63.0	53.0	6.20 / 6.00
K14TE-DG / WT	80	200	7769	4.0	29.0	54.0	5.10
K14QF-DG / WT	80	175	7769	4.0	29.0	54.0	5.70
K12YC	55	170	7063	3.0	31.0	41.0	4.90
K12UC	55	170	7063	3.0	50.0	41.0	5.20
K15YC	80	245	10594	4.0	54.0	59.0	7.00
K15UC	80	245	10594	4.0	73.0	59.0	7.30
K14ZW	81	239	7946	2.5	41.0	51.0	4.90
K15ZS-QEY / REY	80	235	8652	3.0	41.0	54.0	5.10 / 5.30
K15YX-QBR / RBR	80	235	8652	3.0	41.0	54.0	5.10 / 5.30
K18NY-RBR / SBR	80	185	11477	6.0	55.0	54.0	11.70 / 11.90
KB-304	878-1074	1123-1373	1518	25.2-30.8	34.7-42.5	<47	3.20
KB-404	774-946	1103-1349	2225	38.9-47.5	49.9-60.9	<60	4.30
KX-405	765-935	1089-1331	2225	40.8-49.8	52.2-63.8	<60	8.30
KC-4GR	774-946	1103-1349	2225	43.0-52.7	53.4-65.2	<60	4.60
KU308	871-1065	1158-1416	1589	30.0-36.6	39.8-48.6	<50	3.30
KU408 / YG	774-946	1103-1349	2225	38.9-47.5	49.9-60.9	<60	4.45
KV408	839-1025	1135-1387	2225	38.3-46.8	48.2-59.0	<60	4.55
KU453	730-892	961-1175	3355	41.6-50.8	54.2-66.3	<60	5.00
KU50H-DG/WT, KU5J-DG	1020-1280		4661	68	78	62	6.00
KQ409	568-694	1089-1331	3002	18.3-22.4	46.8-57.2	<60	3.90
15WUD	1463		124		8.0	35.0	0.90
20WUD	1042		212		16.0	32.0	1.10
10EGKB	2690		45		5.0	33.0	1.00
15EGKB	2390		97		6.5	37.0	1.30
15TGQZ	1330		141		12	35.0	1.20
20TGQF	1250		312		20.0	41.0	1.30
25TGQ7	959-1172		367		24.8-30.3	45.0	1.90
17CUH	680		53		9.5	26.0	1.70
24CUH	530		94		12.0	27.0	2.70
17CUBM	800		53		9.5	24.0	1.90
24CUBM	680		94		12.0	26.0	2.90
24CGBM	995		129		25.5	38.0	2.90
15AAQ1	1480		170		15.0	31.0	1.40
20AQM8	1109-1301		318		14.9-18.3	37.0	2.30
25AQM7	999-1221		530		25.2-30.8	39.0	2.60
30AQM8	925-1085		727		31.8-38.8	45.0	3.00
20ALA	1280		323		18	38.0	2.00
25ALA	1210		494		25	40.5	2.50
40KAQA	1410		1155		66	51.0	6.40

* Specifications are subject to change without prior notice.
** Actual products & colours may vary from pictures shown.
*** All KDK fans come with Thermal Safety Fuse.



KDK FANS (M) SDN BHD (Company No: 20021001186/568849-X)
Suite 2.01, Level 2, Wisma Ali Bawal 1, 11, Jln Tandang,
46050 Petaling Jaya, Selangor.
Tel : 03-7785 5011
Fax : 03-7785 2655
Website: www.kdk.com.my

MP-26-A

Product Catalogue

2026-2027
1st edition



SINCE 1909
JAPAN